

522


.079"(2.0mm) Crimp Housing and Contact 01 to 80 Contacts

Technical data :


Contact Material : Copper alloy
 Applicable wires : AWG # 24 to 30
 Housing Material : Nylon, UL 94V-0
 Current Rating : 1A AC, DC
 Voltage Rating : 100V AC Maximum
 Temperature Range : -55°C~+105°C
 Contact Resistance : 20 mOhm Max
 Insulation Resistance : 1000 MOhm min
 Withstand Voltage : 800V AC/minute




522-1

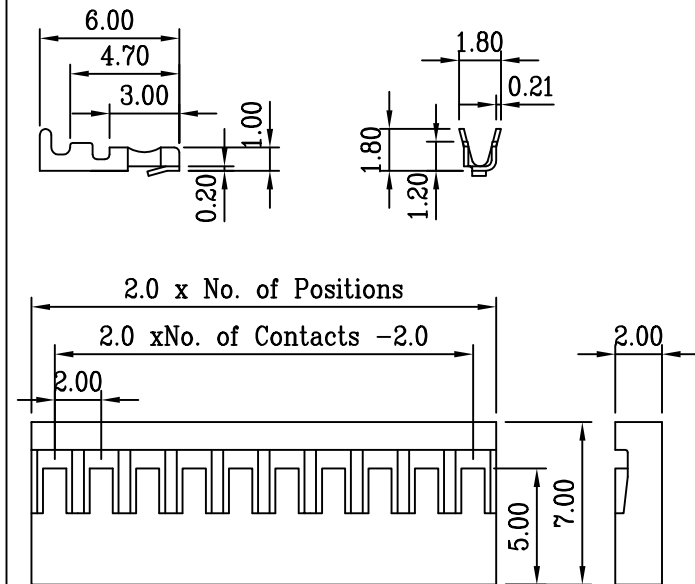


522-2

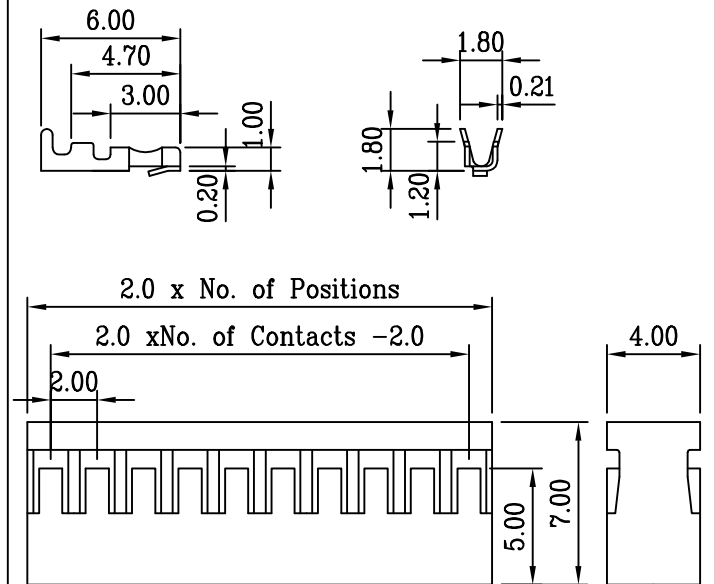

How to order



How to order



Nr. of contact	code
Single	01~40 01~40
Double	04~80 04~80

Connector type	Code
Housing	1
Contact	2

Plating	Code
Gold Plated	10
Tin Plated	50
Omit for housing	