

# 523



## .098"(2.5mm) Shrouded Header and Crimp Housing and Contact 02 to 15 Contacts

### Technical data :


Contact Material : Copper alloy  
 Applicable wires : AWG # 22 to 30  
 Wafer(Housing) Material : Nylon, UL 94V-0  
 Current Rating : 3A AC, DC  
 Voltage Rating : 250V AC Maximum  
 Temperature Range : -25°C~+90°C  
 Contact Resistance : 20 mOhm Max  
 Insulation Resistance : 1000 MOhm min  
 Withstand Voltage : 1000V AC/minute  
 P.C.Board Thickness : 1.6mm(.063")






Housing

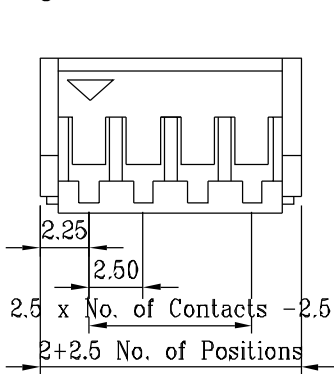

Contact

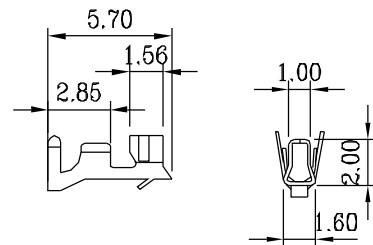

Wafer

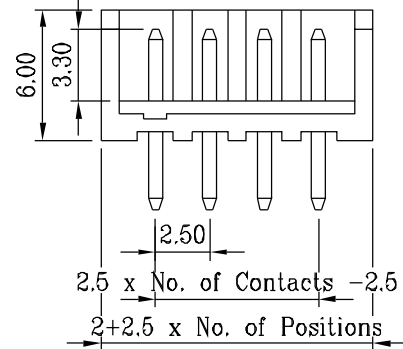

How to order 5 2 3 -       -    

Serie-Nr.                      Nr. of contact                      Connector Type                      Plating

Nr. of contact	code
02~15	02~15

Connector type	Code
Housing	1
Contact	2
Header straight	3
Header Right Angle	4

Plating	Code
Gold Plated	10
Tin Plated	50
Omit for housing	