
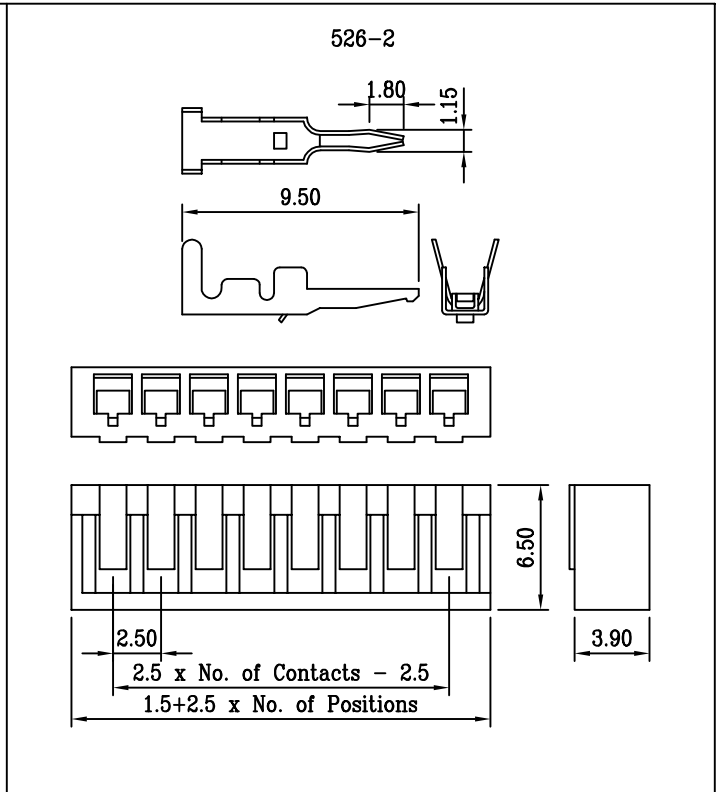
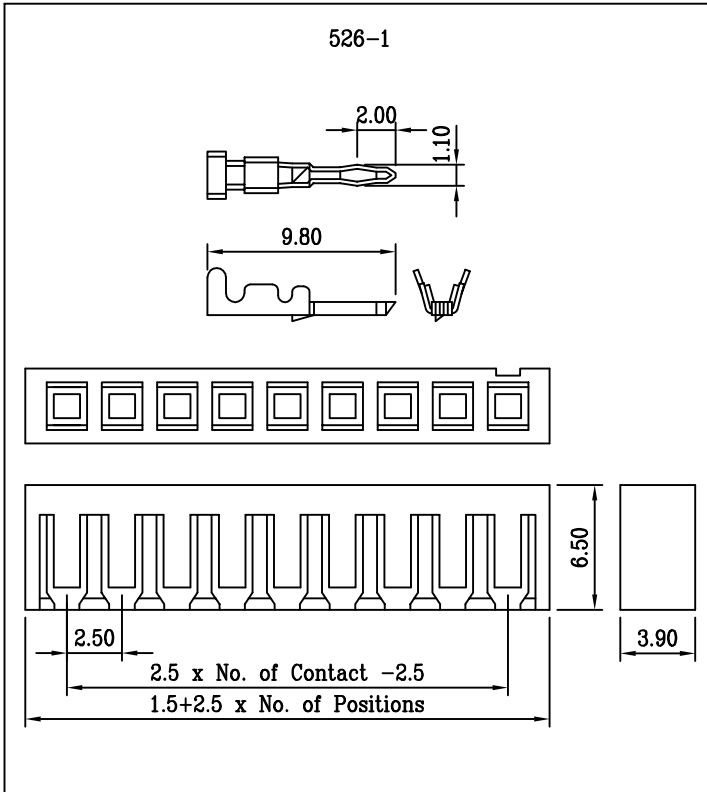


526


.098"(2.5mm) Board-in Crimp Type Connector 02 to 16 Contacts

Technical data :


Contact Material : Copper alloy
 Applicable wires : AWG # 22 to 28
 Housing Material : Nylon, UL 94V-0
 Current Rating : 3A AC, DC
 Voltage Rating : 250V AC Maximum
 Temperature Range : -25°C~+90°C
 Contact Resistance : 20 mOhm Max
 After Environmental Testing
 /20 mohm min
 Insulation Resistance : 1000 MOhm min
 Withstand Voltage : 1000V AC/minute
 P>C>Board Thickness : 1.6mm(.063")



How to order



How to order



Nr. of contact	code
02~16	02~16

Connector type	Code
Housing	1
Contact	2

Plating	Code
Gold Plated	10
Tin Plated	50
Omit for housing	