
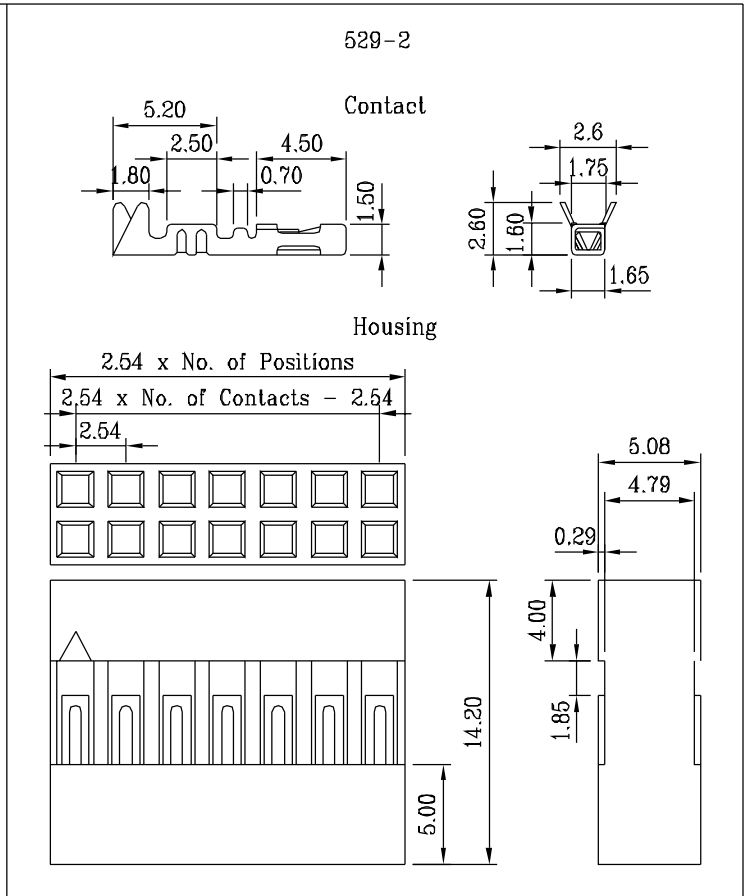
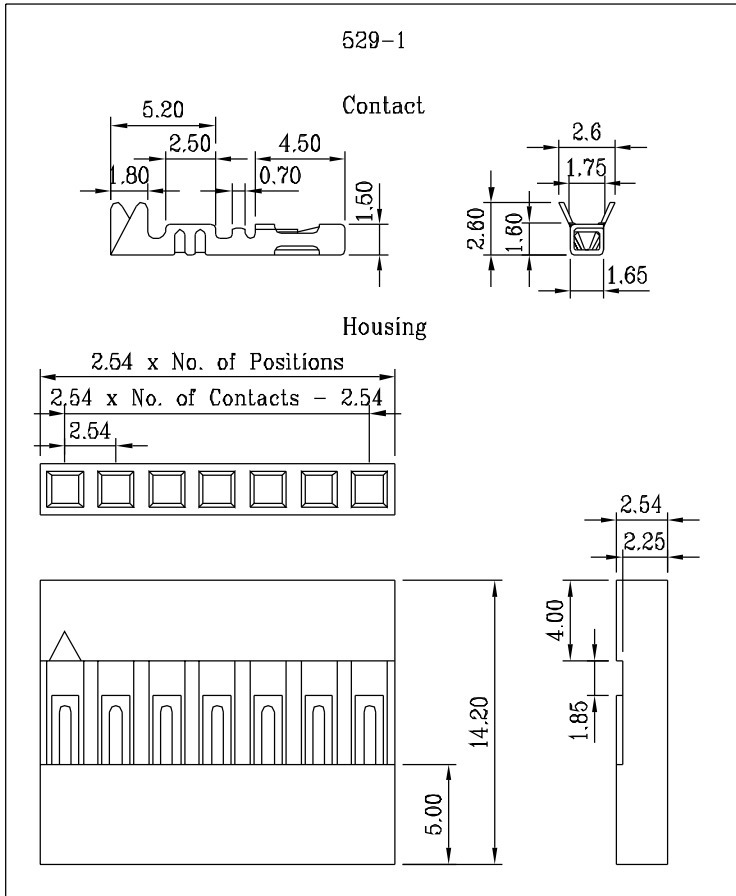


529


.1"(2.54mm) Crimp Housing and Contact Single & Double Row

Technical data :


Contact Material : Copper alloy
 Applicable wires : AWG # 22 to 28
 Housing Material : Nylon, UL 94V-0
 Current Rating : 3A AC, DC
 Voltage Rating : 250V AC Maximum
 Temperature Range : -25°C~+90°C
 Contact Resistance : 20 mOhm Max
 Insulation Resistance : 1000 MOhm min
 Withstand Voltage : 1000V AC/minute
 P>C>Board Thickness : 1.6mm(.063")



How to order

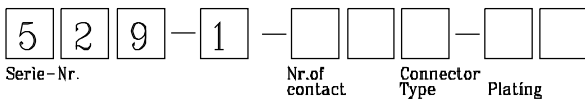

How to order

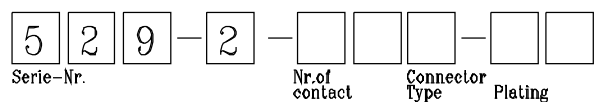

Nr. of contact	code
Single 01~40	01~40
Double 04~80	04~80

Connector type	Code
Housing	1
Contact	2

Plating	Code
Gold Plated	10
Tin Plated	50
Omit for housing	

P.S. The double housing with central bump ARE on request .