
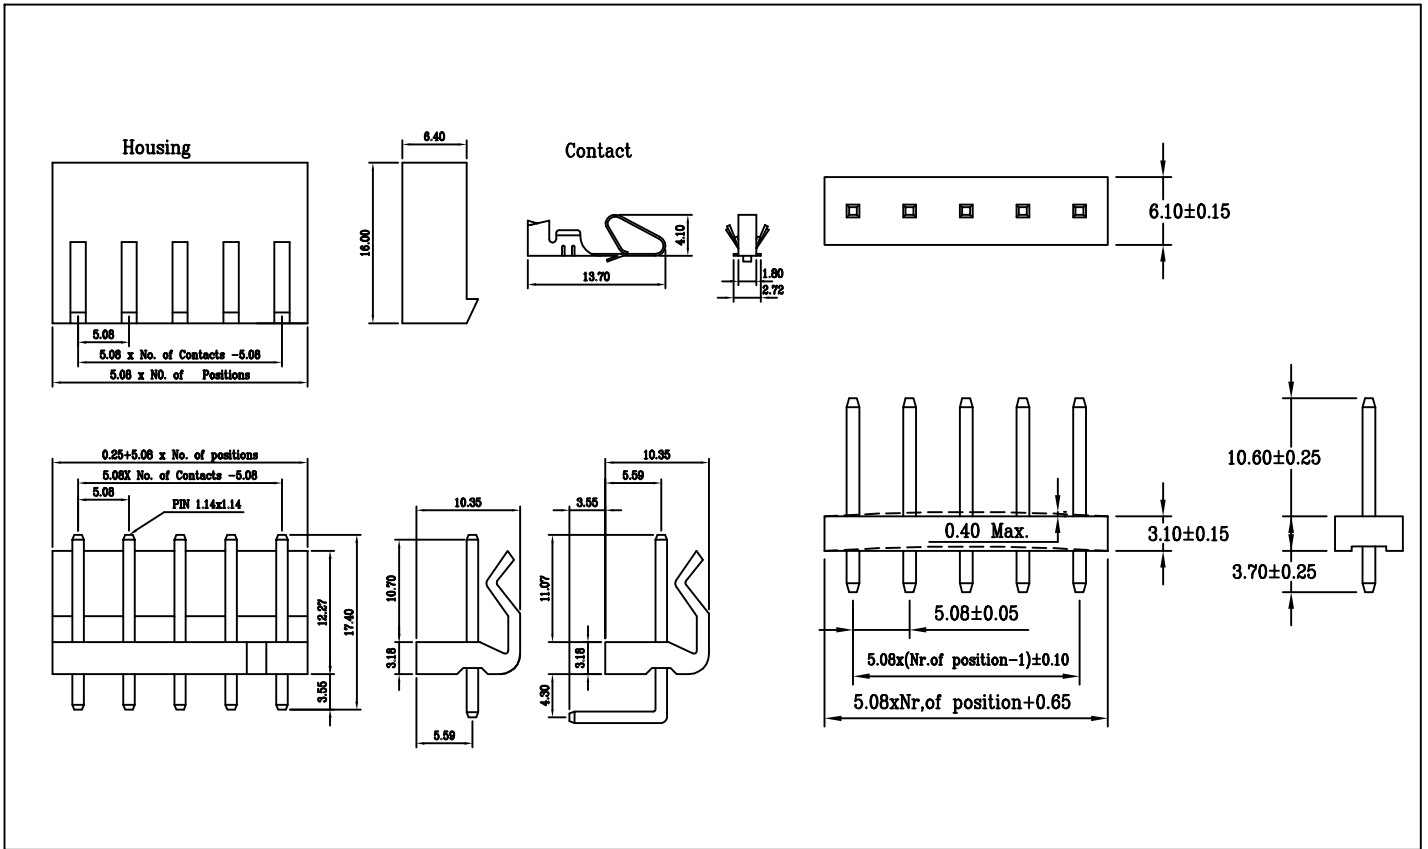


# 535

## .2"(5.08mm) Friction Lock Header and Crimp Housing and Contact 02 to 20 Contacts

### Technical data :

Contact Material : Copper alloy  
 Applicable wires : AWG # 18 to 24  
 Wafer(Housing) Material : Nylon, UL 94V-0  
 Current Rating : 5A AC, DC  
 Voltage Rating : 250V AC Maximum  
 Temperature Range : -25°C~+90°C  
 Contact Resistance : 20 mOhm Max  
 Insulation Resistance : 1000 MOhm min  
 Withstand Voltage : 1500V AC/minute  
 P.C.Board Thickness : 1.6mm(.063")



How to order    -    -

Serie-Nr.                      Nr. of contact                      Connector Type                      Plating

Nr. of contact	code
02~20	02~20

Connector type	Code
Housing	1
Contact	2
Frickle Header straight	3
Lock Header Right Angle	4
W/O Lock Header Straight	5

Plating	Code
Gold Plated	10
Tin Plated	50
Omit for housing	