


532B


3.96mm pitch Power Female Headers Height 9.35 mm

Technical Data :

Insulator Material:	Thermoplastic, UL 94V-0
Contact Material:	copper alloy
Plating:	Tin or Au plated over Nickel, Lead free
Current Rating :	8.2 Amp 30 °C Temperature Rise
Insulator resistance :	1000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds.
(Only for SMT type)	260 °C for 10 seconds.
Mates with :	Pitch 3.96mm, □1.14mm male header

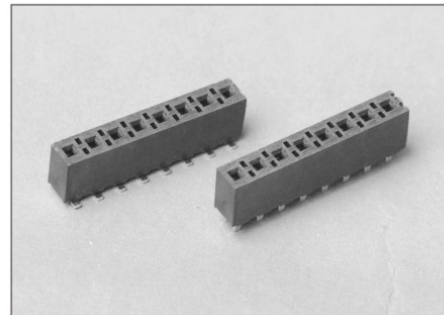

RoHS Compliant

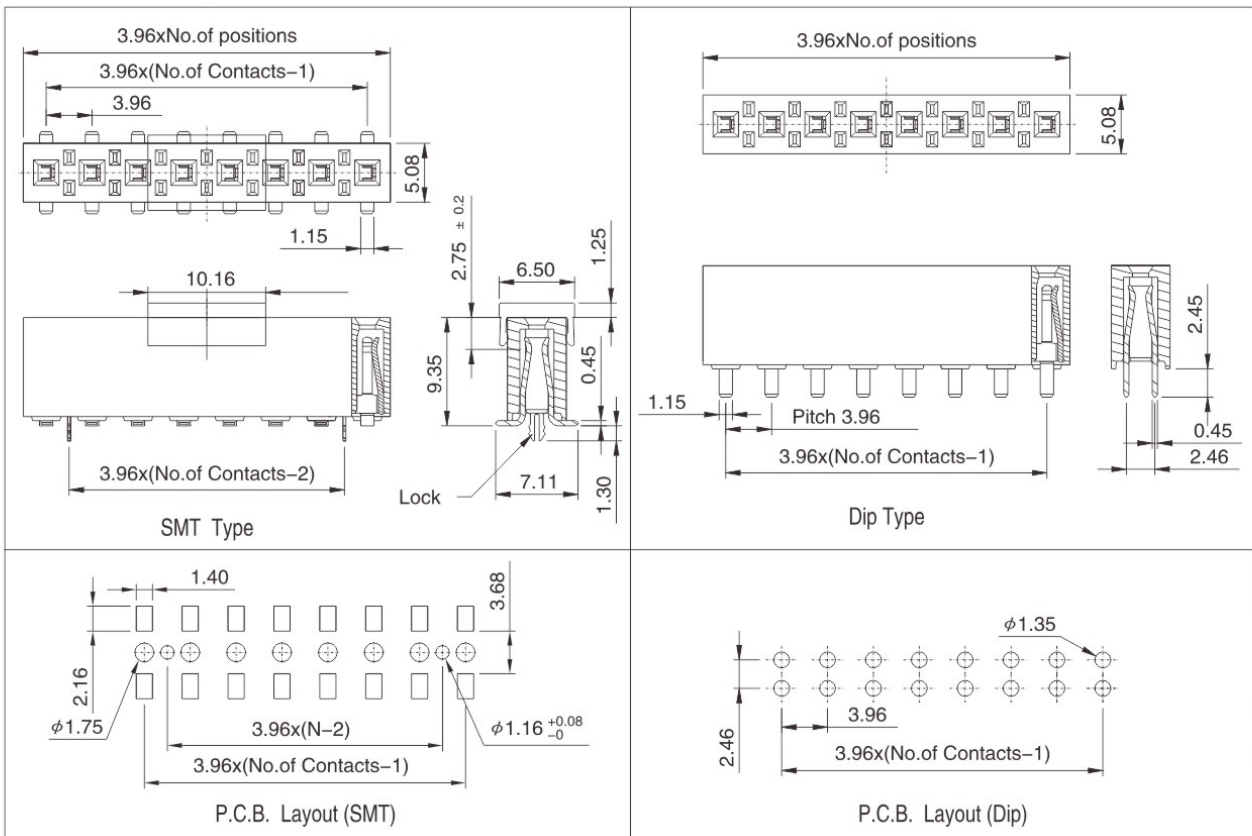

How to order



Nr. of contact	Code
1-Single max.24 poles	02-24

Connector Type	Code
Dip Type	10
SMT type	20

Plating option	Code
Full Gold Flash plated	10
Tin plated	50
Selective gold flash plated	60
10U* Selective gold plated	610
15U* Selective gold plated	615

Pick & Place Pad	Code
W/Cap	1
W/O Cap	2

Lock option	Code
W/ Lock	10
W/O Lock	00

Placking Option	Code
Tube	1
Tape / Reel	2

Contact Material	Code
Phosphor Bronze	2
BeCu	3

W.E.