


# 860

## SFP Connector Pitch 0.8mm SMT Type


### Technical data :

|                        |                                                  |
|------------------------|--------------------------------------------------|
| Insulator body:        | LCP+30%G.F,UL94V-0 color:Black                   |
| Contact:               | Stamped and formed,Phosphor Bronze               |
| plating:               | Sn or Au plated over Nickel                      |
| Durability:            | 100 Cycles Min.                                  |
| Conatct resistance:    | 20 milliohms Max                                 |
| Withstanding Voltage:  | 265V AC/Minute                                   |
| Operating Temperature: | -55 °C ~+125 °C                                  |
| Max.processing Temp:   | 230 °C for 60 seconds.<br>260 °C for 10 seconds. |
| Mate with:             | 1.0mm thickness card                             |

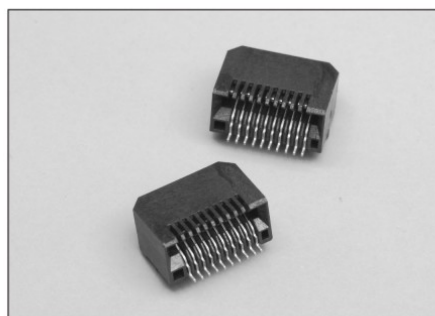

### RoHS Compliant

#### Standard TYPE

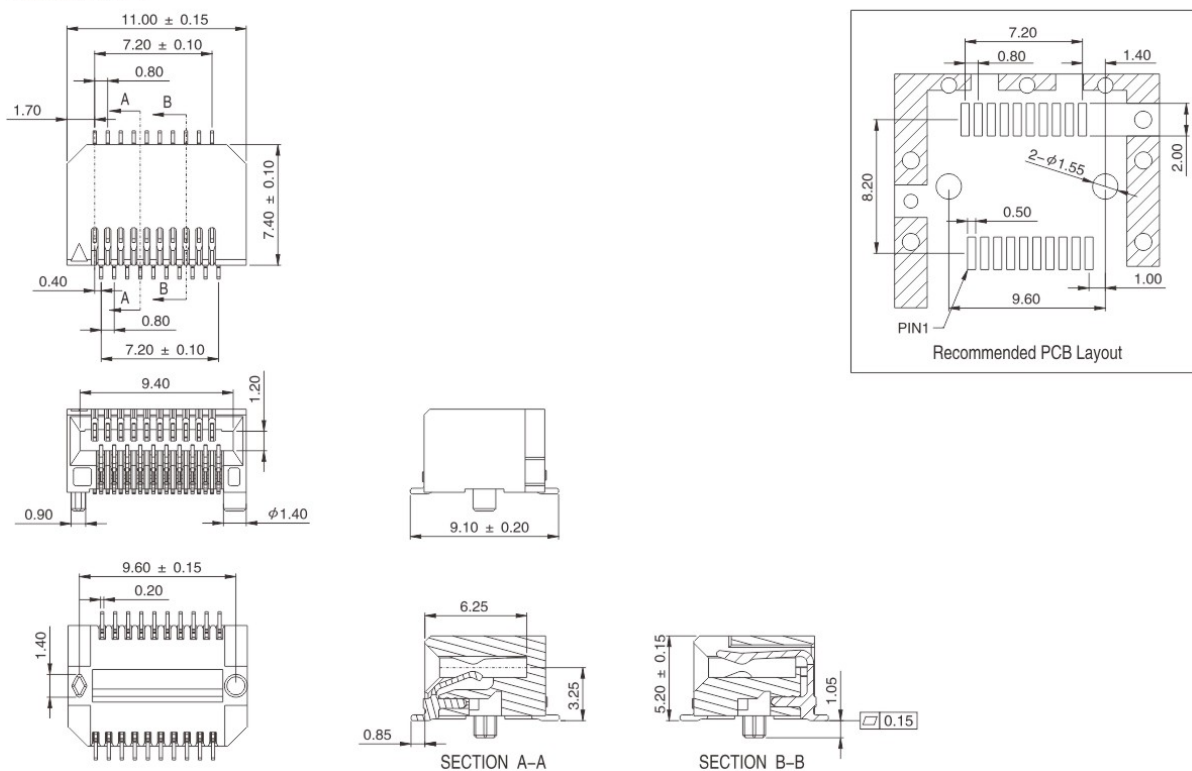

### How to order

|           |   |   |   |               |   |   |                |   |                |   |         |  |  |         |  |
|-----------|---|---|---|---------------|---|---|----------------|---|----------------|---|---------|--|--|---------|--|
| 8         | 6 | 0 | — | 2             | 0 | — | 1              | — | 1              | — |         |  |  | —       |  |
| Serie-Nr. |   |   |   | Nr.of conatct |   |   | Card thickness |   | Profile option |   | Plating |  |  | Packing |  |

| Nr. of Contact | Code |
|----------------|------|
| 20             | 20   |
| N=10           |      |

| card thickness option | Code |
|-----------------------|------|
| 1.0mm                 | 1    |

| Profile option       | Code |
|----------------------|------|
| Standard Type(5.2mm) | 1    |

| Plating option              | Code |
|-----------------------------|------|
| Full Gold Flash plated      | 10   |
| Tin plated                  | 50   |
| Selective gold flash plated | 60   |
| 10u"Selective gold plated   | 610  |
| 15u"Selective gold plated   | 615  |

| Packing Option | Code |
|----------------|------|
| Tube           | 1    |
| Tape & Reel    | 2    |

W.E.