


143A

Pin-Header-Strips-Single row -2.50 mm pitch profile: 3.3mm





Technical Data :

Insulator Material:	High Temperature Thermoplastic, UL 94V-0, Color: black
Contact :	0.635x0.635mm.
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	3 Amp
Insulator resistance :	5000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40° C to +105° C.
Max. processing Temp:	230° C for 30-60 seconds. 260° C for 10 seconds.




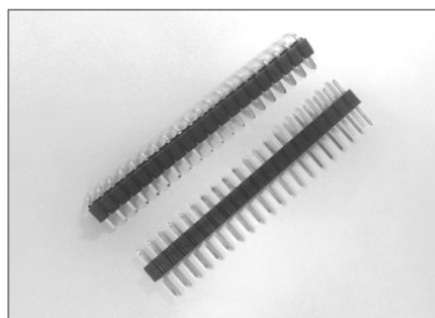


RoHS Compliant

180°

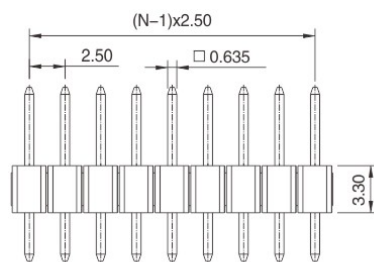

90°

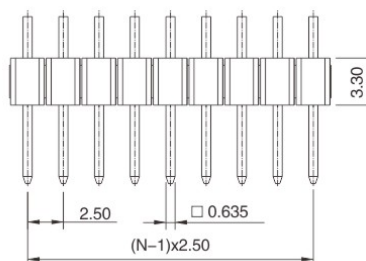

How to order

1 4 3 A — — — — —
Serie-Nr. Terminal code Connector Type Nr. of contact Plating option

Terminal code	Dimensions(mm)			180°
	A	B	C	
10	10.20	4.40	2.50	
11	10.80	5.00	2.50	
12	11.30	4.70	3.30	
13	12.60	6.00	3.30	
14	14.00	7.40	3.30	
15	14.80	8.20	3.30	
16	17.90	11.30	3.30	
17	19.80	13.20	3.30	
18	21.60	15.00	3.30	
19	22.80	16.20	3.30	
20	24.90	18.30	3.30	
26	14.50	7.90	3.30	
XXX/XXX	AS Request B/C FOR EX. B:7.0C:3.0 CODE Nr.:7.0/3.0			

Terminal code	Dimensions(mm)			90°
	B	C	D	
12	3.50	3.30	4.70	
13	4.80	3.30	4.70	
14	6.10	3.30	4.70	
15	6.90	3.30	4.70	
16	9.90	3.30	4.70	
17	12.00	3.30	4.70	
18	13.80	3.30	4.70	
19	15.00	3.30	4.70	
20	17.10	3.30	4.70	
xxx/xxx	As request For EX. B=6.50 C=3.0 D=4.9 Code Nr.=6.50/3.0/4.9			

Connector Type	Code
Straight	180 °
Right Angle	90 °

Number of contact	Code
01 ~ 40pins	01 ~ 40

Note:white color of insulator is available

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

W.E.