


Pin-Header-Strips-Single/Double row-2.54mm Right angle


Technical Data :

Insulator Material:	High Temperature Thermoplastic,UL 94V-0
Contact :	0.635x0.635mm.
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	3 Amp
Insulator resistance :	5000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	157,159,160,165,342,348,622,624,625

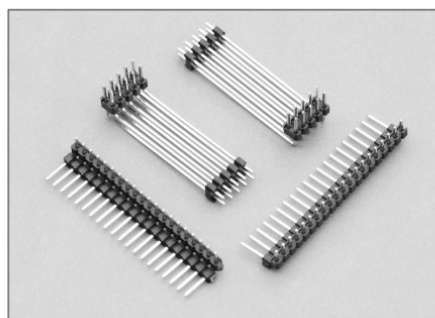


RoHS Compliant

146-2

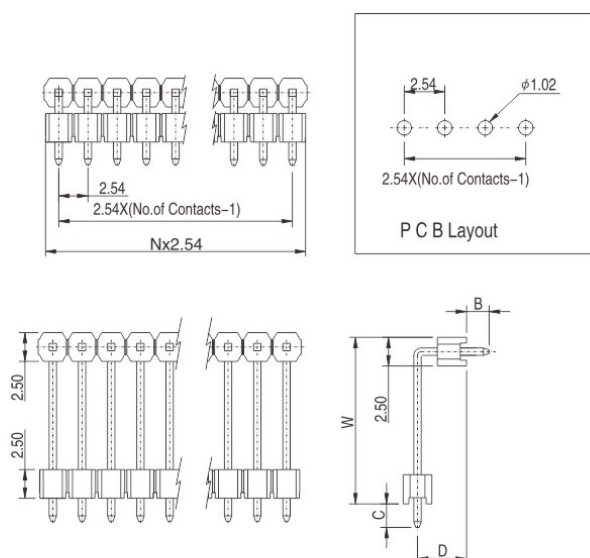

147-2

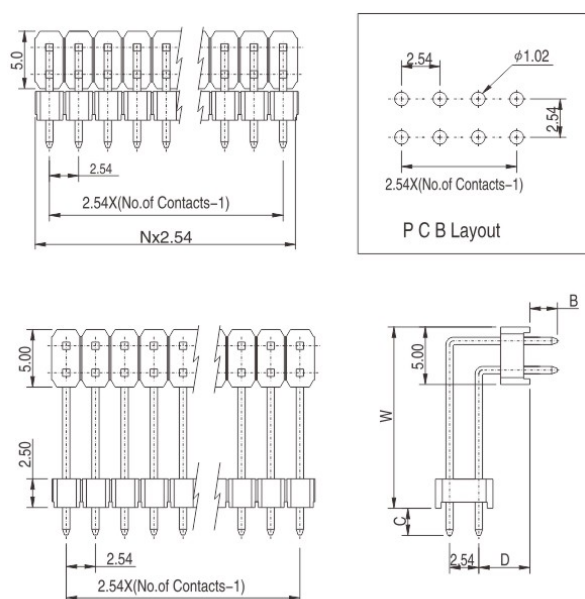

How to order

1 4 6 — 2 — — —

1 4 7 — 2 — — —

Serie-Nr. Terminal code Nr. of contact Plating option

Terminal code	Dimensions(mm)			
	B	C	D	W
12	4.60	3.30	3.90	13.5
13	4.80	3.30	3.90	16.8
XX/XX/XX	as request			
FOR Eg. B=4.65,C=3.2,D=6.2,W=15.6				
CODE Nr.=4 65/3 2/6 2/15 6				

Number of contact	Code
01~50 Single	01~50
04~100 Double	04~100

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

W.E.