


Pin-Header-Strips-Single/Double row -2.54 mm pitch-Right angle






High Temperature
Thermoplastic,UL 94V-0

626

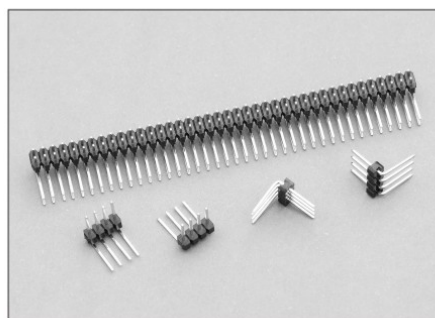






RoHS Compliant

146A serie




Cap option	Cap Length
PIN ≤ 3	L=5.0mm
PIN > 3	L=10.0mm

147A serie



Cap option	Cap Length
PIN ≤ 6	L=5.0mm
PIN > 6	L=10.0mm

How to order

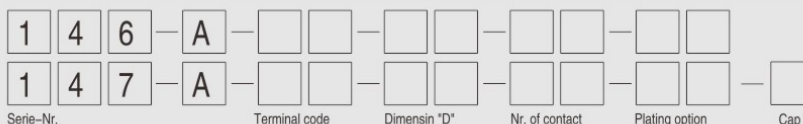

Terminal code	Dimensions(mm)		Terminal code	Dimensions(mm)	
	B	C		B	C
12	3.50	3.30	18	13.80	3.30
13	4.80	3.30	19	15.00	3.30
14	6.10	3.30	20	17.10	3.30
15	6.90	3.30	xxx/xx	As request	
16	9.90	3.30		B=6.50 C=3.0	
17	12.00	3.30		Code Nr.=6.5/3.0	

Pick & Place pad	Code
W / Cap	1
W / O Cap	2

Dimension "D"	Code
3.90	10
4.10	20
As request For Eg. D=4.0 Code Nr.=4.0	XX

Number of contact	Code
04-80-poles Double	04-80
01-40-poles Single	01-40

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

W.E.

WEITRONIC ENTERPRISE CO., LTD. Web.Site: www.weitronictw.com.tw E-mail: info@weitronictw.com.tw