


146B, 147B

Pin-Header-Strips-Single/Double row -2.54 mm pitch-Right angle


Technical Data :

Insulator Material:	High Temperature Thermoplastic, UL 94V-0
Contact :	0.635x0.635mm.
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	3 Amp
Insulator resistance :	5000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	157,158,159,160,162,342,622,624,625

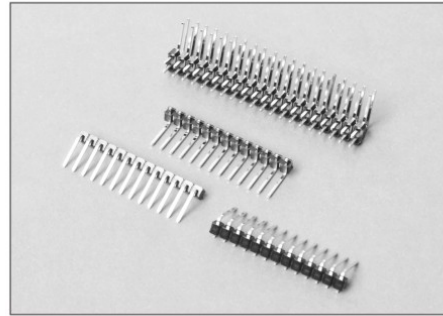


RoHS Compliant

146B serie

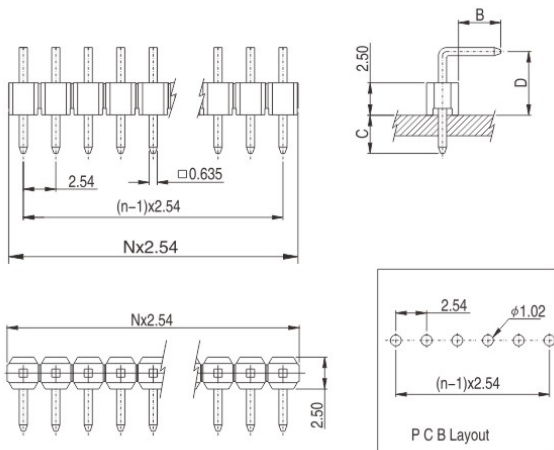

147B serie

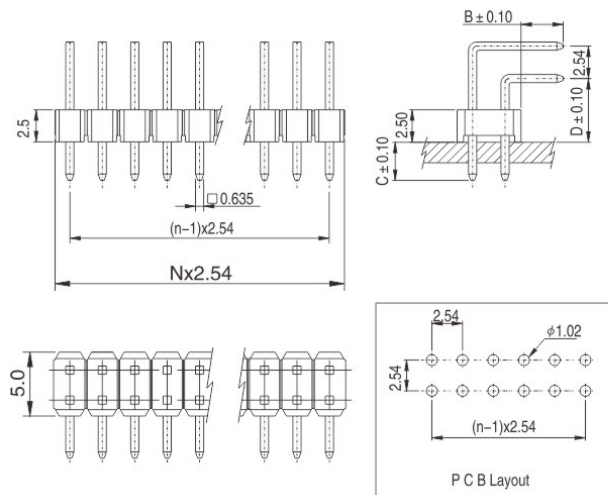

How to order

1	4	6	B	—	—	—	—	—	—	—	—
1	4	7	B	—	—	—	—	—	—	—	—
Serie-Nr.			Terminal code	Dimension "D"	Nr. of contact	Plating option					

Terminal code	Dimensions(mm)		Terminal code	Dimensions(mm)	
	B	C		B	C
12	3.50	3.30	18	13.80	3.30
13	4.80	3.30	19	15.00	3.30
14	6.10	3.30	20	17.10	3.30
15	6.90	3.30	xxx/xx	As request For Eg. B=6.50, C=3.0	
16	9.90	3.30		Code Nr.=6.50/3.0	
17	12.00	3.30			

Number of contact	Code
01-50-poles Single	01-50
04-100-poles Double	004-100

Dimensions "D"	Code
3.90	10
4.10	20
As request For Eg. D=4.0	XX
Code Nr.= 4.0	

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

W.E.