


Pin-Header-Strips with round contact 2.54mm pitch Vertical SMT Type






Technical Data :

Insulator Material:	High Temperature Thermoplastic,UL 94V-0
Contact :	φ0.50mm
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	3 Amp
Insulator resistance :	5000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	2.54mm Pitch PCB connector

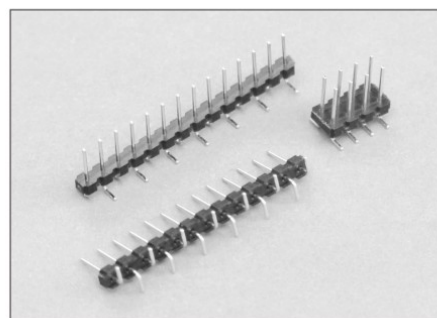


RoHS Compliant

Cap option	Length
PIN < 6	L=5.00mm
PIN = 6	L=7.50mm
PIN > 6	L=8.50mm

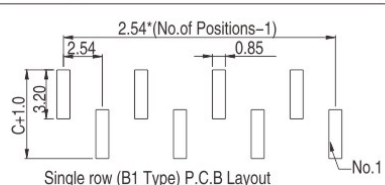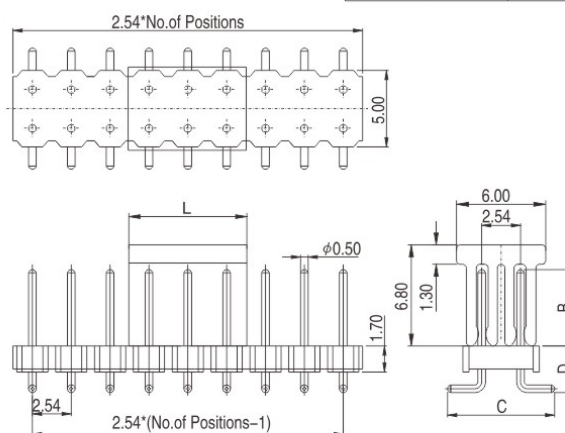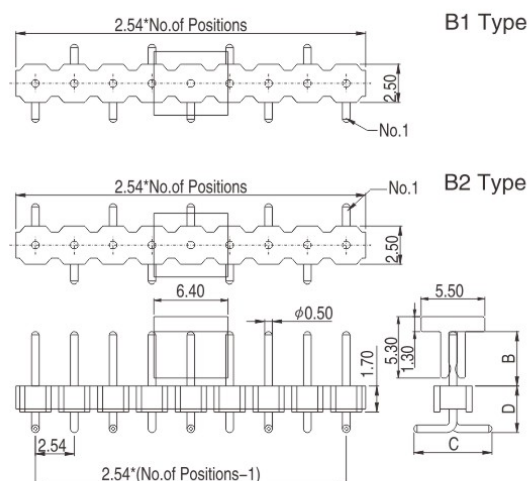

How to order



Dimensions(mm)(Single)			Terminal code
B	C	D	
2.1(min)	4.2(min)	3.4(min)	10
3.60	4.20	4.80	
7.5(max)	7.6(max)	5.0(max)	
As request			XXX/XXX/XXX
FOR Eg. B=4.00, C=5.5, D=3.8			
CODE Nr. =4.0/5.5/3.8			

Dimensions(mm)(Double)			Terminal code
B	C	D	
2.1(min)	6.94(min)	3.4(min)	00
3.60	6.94	4.80	10
7.5(max)	9.1(max)	5.0(max)	99
As request		XXX/XXX/XXX	
FOR Eg.B=4.00,C=7.2,D=3.8			
CODE Nr. =4.0/7.2/3.8			

Layout option	Code
Single row B1 TYPE	11
Single row B2 Type	12
Double row	20

Number of contact	Code
02–25–poles Single	02–25
04–40–poles Double	04–40

Plating option	Code
Gold plated	10
Tin plated	50

Pick & Place Pad	Code
W/ Cap	1
W/O Cap	2

Packing Option	Code
Tube	1
Tape & Reel	2

W.E.