


152-3


Pin-Header-Strips-Single/Double row with round contact 2.54mm pitch-Right angle

Technical Data :

Insulator Material:	High Temperature Thermoplastic,UL 94V-0
Contact :	φ0.50mm
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	3 Amp
Insulator resistance :	5000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	2.54mm Pitch PCB connector

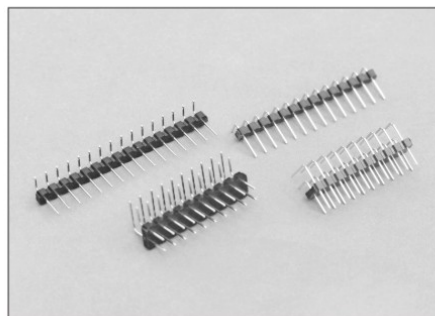

RoHS Compliant

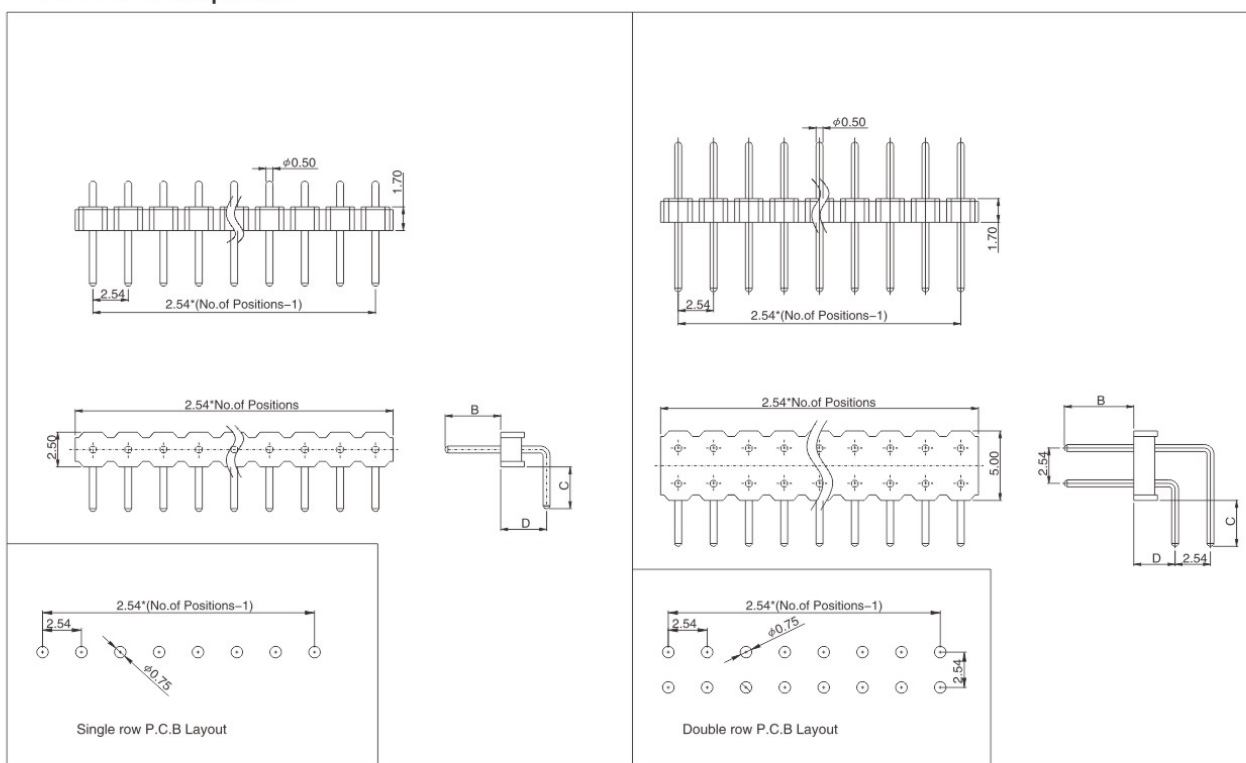

How to order

1	5	2	-	3								
Serie-Nr.					Terminal Code		Dimensions D		Layout option		Nr.of Contact	
											Plating	

Dimensions(mm)		Terminal code
B	C	
2.1(min)	1.00(min)	10
3.50	3.30	
5.5(max)	5.0(max)	
As request		XXX/XXX
FOR Eg.B=4.0,C=3.0		
CODE Nr. =4.0/3.0		

Dimensions "D"	Code
3.20(Min)	3.20
3.60	3.60
5.0(max)	5.0
As request	XX
For Eg. D=4.0	
Code Nr.=4.0	

Layout option	Code
Single row	1
Double row	2

Number of contact	Code
02-25-poles Single	02-30
04-40-poles Double	04-60

Plating option	Code
Gold plated	10
Tin plated	50

W.E.