

353-1







Pin-Header-Strips-Single row -Dual body Vertical SMT type

Technical Data :

Insulator Material:	High Temperature Thermoplastic,UL 94V-0
Contact :	0.635x0.635mm.
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	3 Amp
Insulator resistance :	5000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.

Mates with : 157,158,159,160,162,342,622,623,624,625

RoHS Compliant

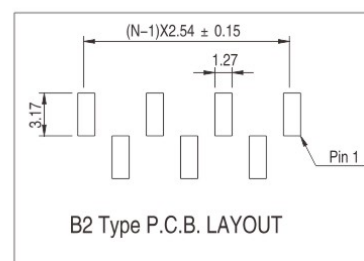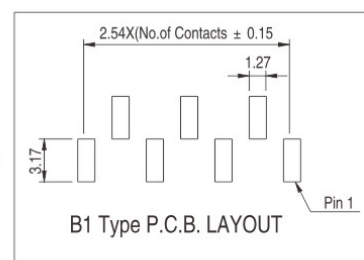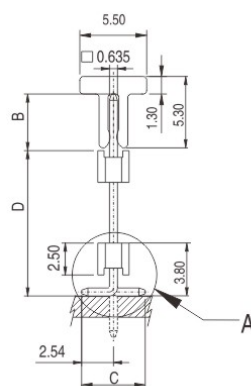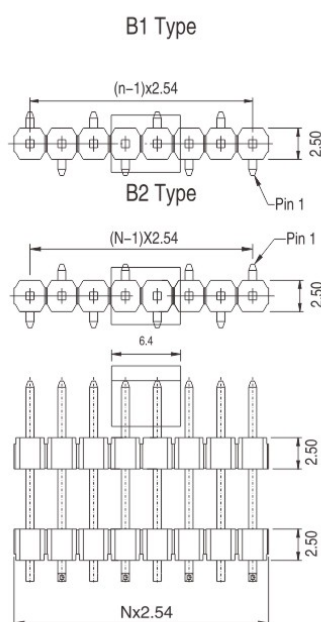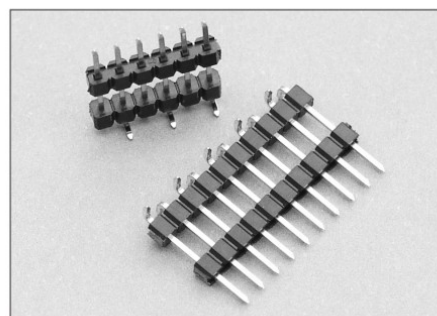

How to order



Terminal code	Dimensions(mm)		
	B	C	D
13	3.50	5.08	7.2
14	4.80	5.08	7.2
15	6.10	5.08	6.7
16	6.90	5.08	8.9
xx/xx	As request		
For Eg. B=7.0 D=6.5 Code Nr =7.0/6.5			

Number of contact	Code
single row 02 - 30	02-30
Layout option	Code
B1 Type	21
B2 Type	22

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

Pick & Place pad	Code
W / Cap	1
W / O Cap	2
Packing option	Code
Tube	1
Tape & Reel	2

W.E.