353A

Pin–Header–Strips–Single row for Surface Mount Technic and High–Temperature Body 2.54mm pitch

Technical Data :

Insulator Material:	High Temperature Thermoplastic,UL 94V–0
Contact :	0.635x0.635mm.
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	3 Amp
Insulator resistance :	5000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	–40 ℃ to +105 ℃ .
Max. processing Temp:	230 ℃ for 30–60 seconds. 260 ℃ for 10 seconds.
Mates with :	626

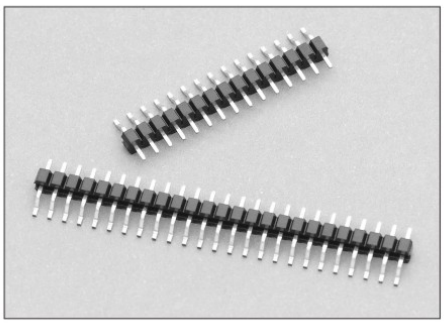

RoHS Compliant

TYPE A

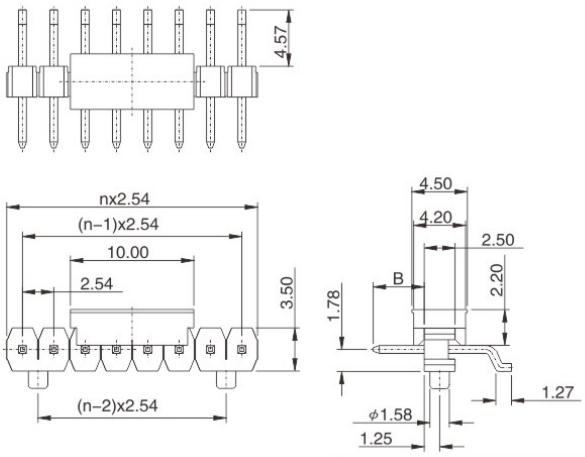

TYPE B

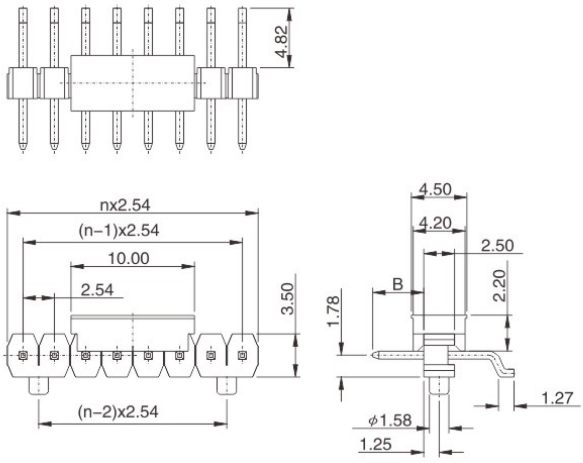

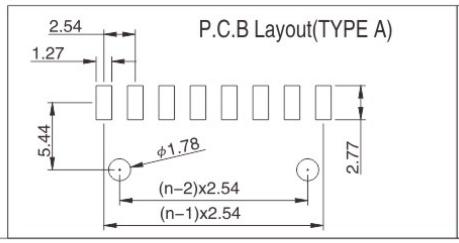

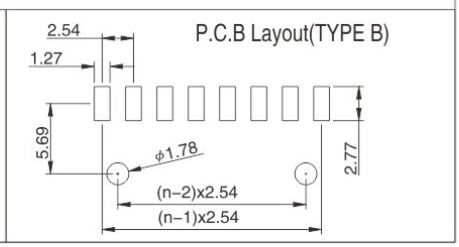

How to order

3	5	3	A	–			–			–				–			–		–		
Serie–Nr.					Terminal code			Layout			Nr.of	Contact			Plating			Cap Option		Packing Option		Location peg

Terminal code	Dimensions(mm) B
13	3.05
14	5.84
15	8.13
16	10.67
xx	AS request
For Eg. B=4.0 Code Nr.=4.0	

Layout	Code
Horizontal right angle A	10
Horizontal right angle B	20

Number of contact	Code
02~30–poles Single	02~30

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

Pick & Place Pad	Code
W/ Cap	1
W/O Cap	2

Packing Option	Code
Tube	1
Tape & Reel	2

Location peg option	Code
W/ peg	10
W/O peg	00

W.E.