


378-1


Low Profile header 1.27mmx2.54mm

Technical Data :

Insulator Material:	High Temperature Thermoplastic,UL 94V-0.
Contact :	0.46x0.46mm
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	1 Amp
Insulator resistance :	500 Megohms min
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	377, IDC Socket

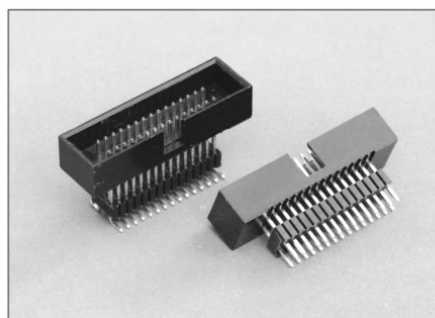

RoHS Compliant

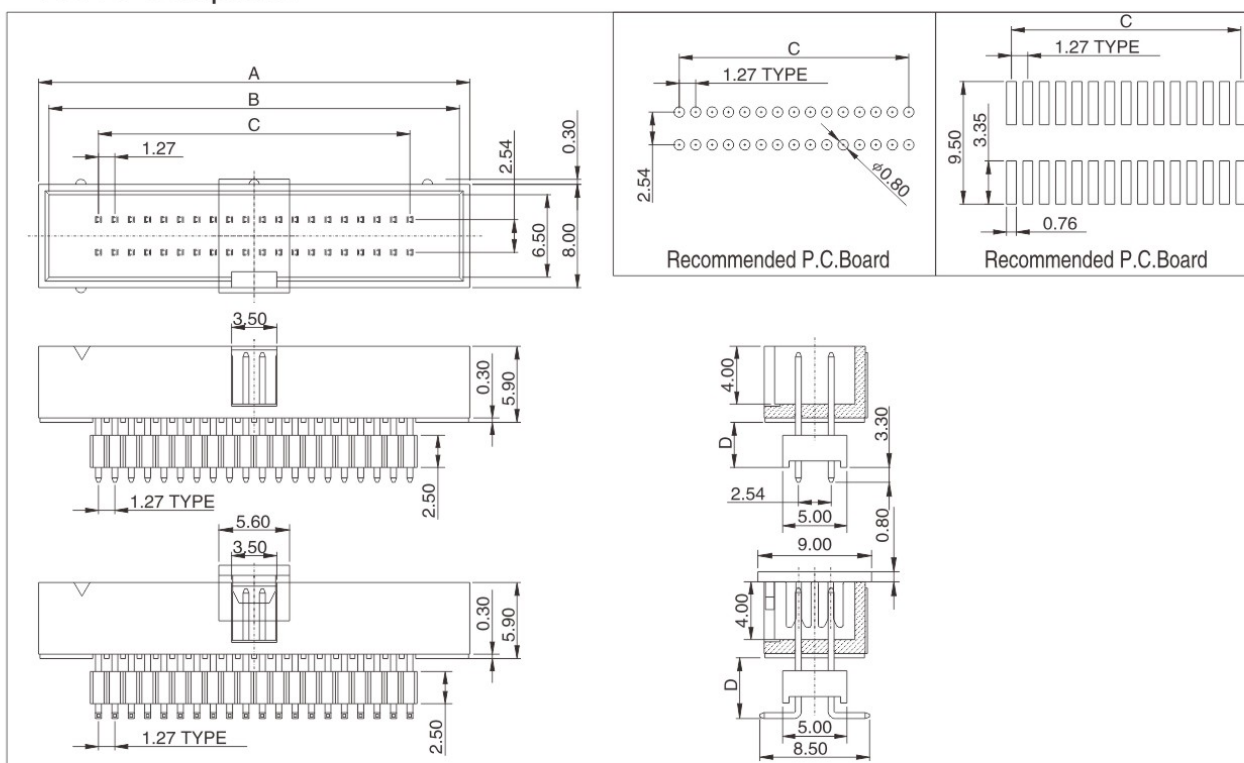

How to order

3 7 8 - 1 -

Serie-Nr. Nr.of Contact. Connector Type Dimensions "D" Plating Cap option Packing option

Nr.of contact	Dimensions(mm)			code
	A	B	C	
20	20.70	19.10	11.43	20
26	24.51	22.91	15.24	26
30	27.05	25.45	17.78	30
34	29.59	27.99	20.32	34
40	33.40	31.80	24.13	40

Nr.of contact	Dimensions(mm)			code
	A	B	C	
50	39.75	38.15	30.48	50
60	46.10	44.50	36.83	60
68	51.18	49.58	41.91	68
80	58.80	57.20	49.53	80
100	71.50	69.90	62.23	100

Connector Type	Code
Dip solder straight	1
SMT Style	2

Dimensions "D"	Code
As request For Eg. D=4.05 Code Nr.= 4.05	XX

Plating Option	Code
Gold plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

Cap option	Code
W/ Cap	1
W/O Cap	2

Packing Option	Code
Tube	1
Tape & Reel	2

W.E.