


539C

5.08/2.00PH Power COMBO Headers DIP Type



Technical Data :

Insulator Material:	Thermoplastic, UL 94V-0
Contact :	1.14x1.14mm
Contact Material:	copper alloy
Plating:	Power Pin: Tin plated over nickel Signal Pin: Tin or Au plated over nickel
Current Rating :	8.2Amp 30° C Temperature Rise(Power)
Insulator resistance :	1000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40° C to +105° C.
Max. processing Temp:	230° C for 30-60 seconds. 260° C for 10 seconds.
Mates with :	Pitch 5.08mm, 539D


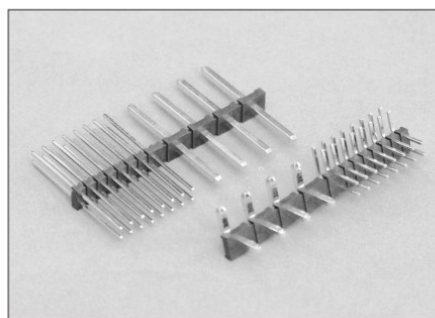


RoHS Compliant

R.A TYPE

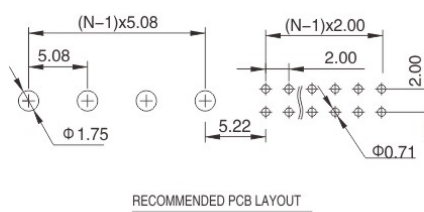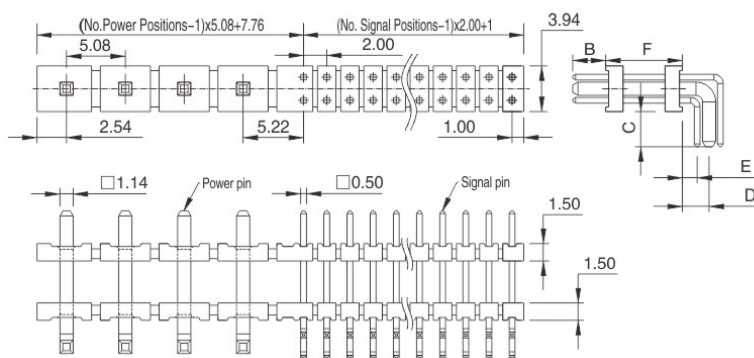

DIP TYPE

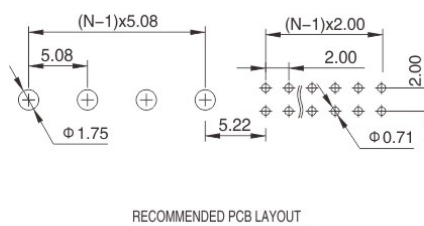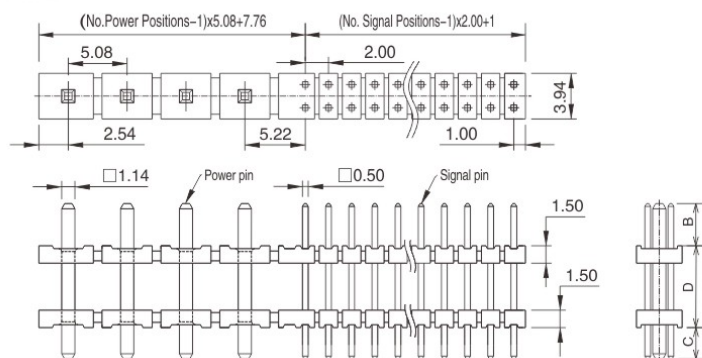

How to order

5	3	9	C								
Series-Nr.	Nr. of Signal contact	Nr. of Power contact	Connector Type	Terminal code	Plating						

Nr. of Signal Contact	Code
Double Row 02 to 78 poles	02-78
Nr. of Power Contact	Code
Single Row 01 to 4 poles	01-04
Connector Type	Code
Dip Type&Dual Body	12
Ringht Angle type&Dual Body	22

Terminal code	Dimensions(mm)								
	Ringht Angle type&Dual Body					Dip Type&Dual Body			
	B	C	D	E	F	B	C	D	
10	4.00	3.04	2.30	1.27	7.62	4.00	2.71	7.62	
20									
xxx	as request					as request			
	For Eg. B=4.00 C=3.04 D=2.3 F=6.8 CODE Nr=4.00/3.04/2.30/6.8					For Eg. B=4.00 C=3.04 D=6.8 CODE Nr=4.00/3.04/6.8			

Plating option	Code
Full Gold Flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
Note: Power Pins = All Tin	

W.E.