

596


1.0mm Pitch strip header

Technical Data :


Insulator Material:	High Temperature Thermoplastic, UL 94V-0.
Contact :	0.30x0.30mm
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	1 Amp
Insulator resistance :	500 Megohms min
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40° C to +105° C.
Max. processing Temp:	230° C for 30-60 seconds. 260° C for 10 seconds.

Mates with : 597

RoHS Compliant

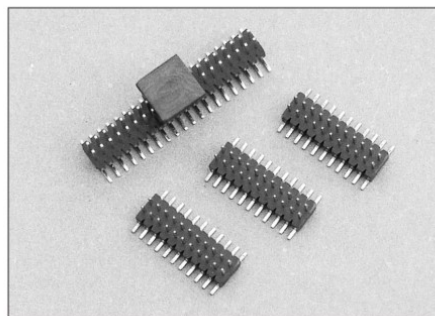

SMT Type

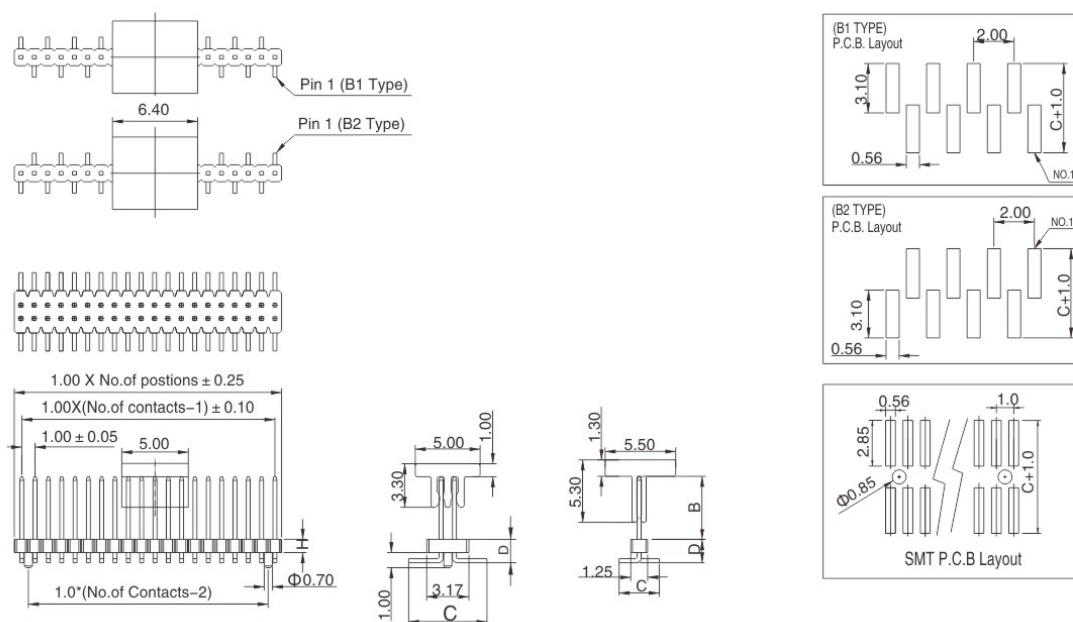

How to order

- - - - - - -

Serie-Nr. Nr. of Contact Profile Connector type Dimension Plating Cap option Packing Location Peg

Nr. of Contact	Code
Single 01-50 Pin	01-50
Double 02-100 pin	02-100

Profile Option	Code
H=1.0 Single Row	1
SMT B1 Type	
H=1.0 Single Row	4
SMT B2 Type	
H=1.0 Double Row	2
H=1.5 Double Row	3

Connector type	Code
SMT type	11

Dimension(mm)	Code
B C D	
As request :	XX/XX/XX
For Eg. B=3.2, C=6.5, D=2.8	
CODE Nr.=3.2/6.5/2.8	

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

Pick & Place Pad	Code
W/ Cap	1
W/O Cap	2

Packing Option	Code
Tube	1
T&R	2

Location peg option	Code
W/ Location peg	10
W/O Location peg	00
For double row only. W/Location peg option for 2 x Even Pin For Eg. 2x2, 2x4,.....2x48, 2x50	

W.E.