


Pin-Header-Strips-Single/Double row -1.27mm pitch-Right angle




Insulator Material:	High Temperature Thermoplastic, UL 94V-0.
Contact :	0.46x0.46mm
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	1 Amp
Insulator resistance :	500 Megohms min
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30–60 seconds. 260 °C for 10 seconds.

Mates with : 317,377,603,604



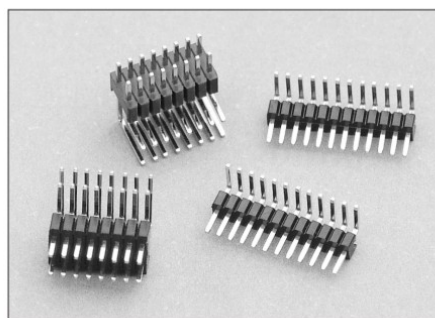


RoHS Compliant

600-3serie

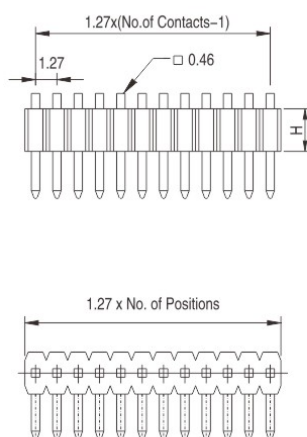

600-4 serie
1.27mmx2.54mm

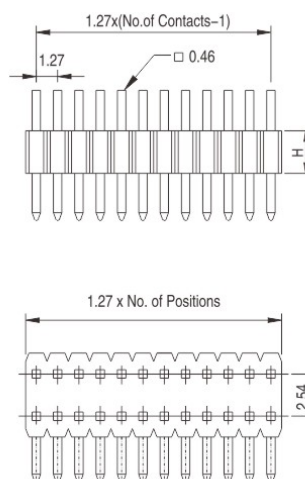

How to order

6	0	0	—	3	—			—			—			—		
6	0	0	—	4	—			—			—			—		
Serie-Nr.				Terminal code		Nr. of contact			Connector Type			Plating option				

Terminal code	Dimensions(mm)		
	B	C	D
12	2.80	2.60	3.9
13	4.00	2.60	3.9
14	6.00	2.60	3.9

As request :

FOR Eg. B=1.65, C=2.29,D=4.0

CODE Nr.=1.65/2.29/4.0

Number of contact		Code
02~40 poles	single	02~40
04~100 poles	Double	04~100

Connector Type	Code
Profile H 1.7mm,single row	10
Profile H 2.54mm,single row	11
Profile H 2.54mm,double row	20

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

W.E.