


600-7

Pin-Header-Strips-Single/Double row-1.27mmx1.27mm pitch-Right angle

Technical Data :


Insulator Material:	High Temperature Thermoplastic,UL 94V-0.
Contact :	0.40x0.40mm
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	1 Amp
Insulator resistance :	500 Megohms min
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.

Mates with : 606-1,613 and 1.27mm Female header

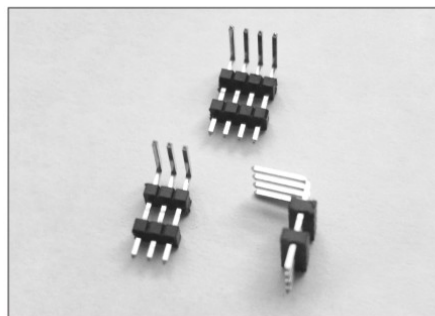


RoHS Compliant

600-7 Dual Body

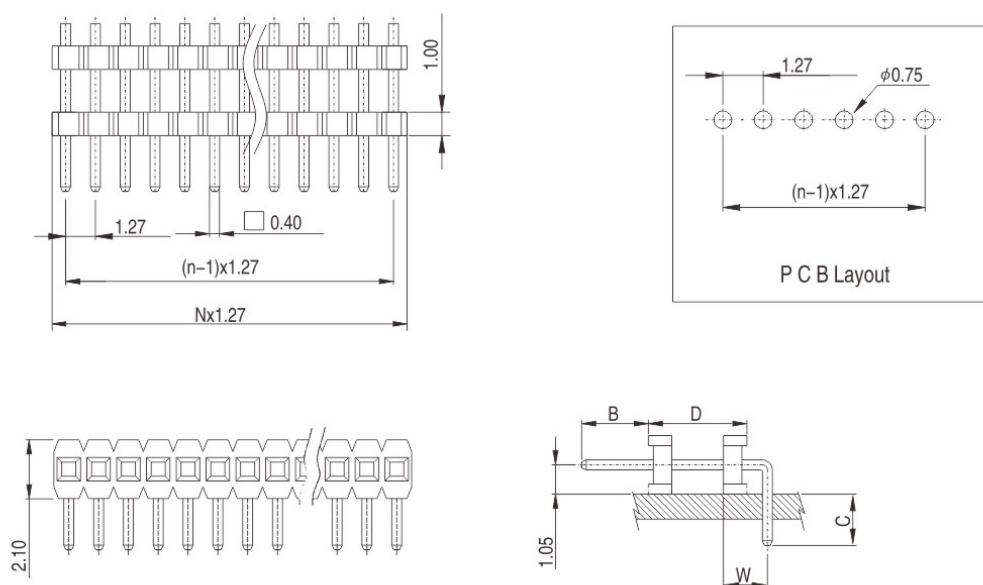

How to order



Terminal code	Dimensions(mm)			
	B	C	D	W
12	2.20	2.00	4.00	2.6
13	2.20	2.00	4.70	2.6
XXX/XX/XX	as request			
FOR Eg. B=3.05,C=2.1,D=4.1,W=2.9				
CODE Nr.=3.05/2.1/4.1/2.9				

Number of contact	Code
04-100	04-100

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

W.E.