


600








Pin header strip 1.27mm pitch

Technical Data :

Insulator Material:	High Temperature Thermoplastic, UL 94V-0.
Contact :	0.46x0.46mm
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	1 Amp
Insulator resistance :	500 Megohms min
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	317,377,603,604

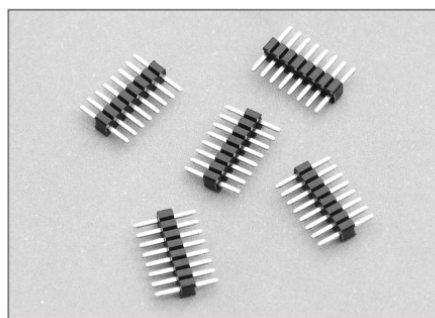

RoHS Compliant



How to order

6 0 0 — — — — —
 Serie-Nr. Nr. of Contact. Nr. of Row Connector Type Dimension Plating option

Nr. of Contact	Code
single Row Max.50 contacts	002-050
Double Row Max. 100 contacts	002-100

Nr. of Row	Code
Single Row straight	1
Double Row straight	2

Connector Type	Code
Insulator Height:1.7-1*50	10
Insulator Height:2.54-1*50	11
Insulator Height:2.54-2*50	20

Dimensions	Code	Dimensions	Code	Dimensions	Code
B C		B C		B C	
2.8 2.6 10	4.83 3.05 60	10.29 3.05 65			
6.0 3.0 20	5.21 3.05 61	10.92 3.05 66			
5.84 3.05 30	7.24 3.05 62	12.32 3.05 67			
2.54 3.05 40	8.51 3.05 63	13.59 3.05 68			
5.84 4.45 50	9.91 3.05 64	15.37 3.05 69			

as request :
 FOR Eg. B=2.8 ,C=2.6
 CODE Nr.=2.8/2.6

Plating option	Code
Full gold flash plated	10
Tin plated	50
selective gold flash plated	60
10u" Selective gold plated	610
15u" Selective gold plated	615
20u" Selective gold plated	620
30u" Selective gold plated	630

W.E.