


614


2.0mmX2.0mm Shrouded Stacker

Technical Data :

Insulator Material:	High Temperature Thermoplastic, UL 94V-0
Contact :	0.50x0.50mm.
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	1 Amp
Insulator resistance :	500 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	343 IDC Socket

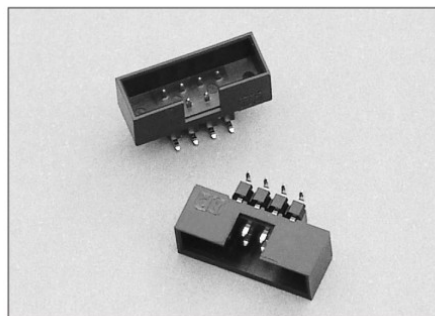

RoHS Compliant

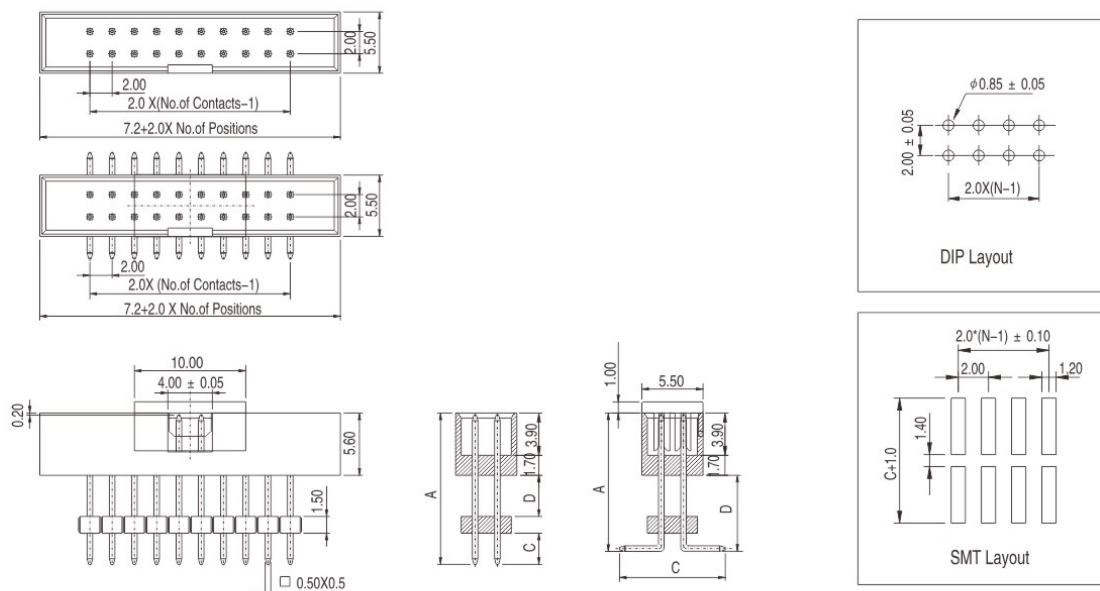

How to order

6	1	4									
Series-Nr.	Nr. of Contact	Connect Type	Dimension	Plating	Cap option	Packing option					

Number of contact	Code
06-68	06-68

Connector type	Code
Dip 180 °	1
SMT Type	3

Dimensions(mm)		Dip	SMT	code
A	D	C		
13.60	3.70	2.80	9.00	10
13.80	3.90	2.80	9.00	20
AS request		XXX/XX/XX		
FOR Eg. A=14.2 D=5.8 C=9.50				
CODE Nr.=14.2/5.8/9.50				

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

Cap option	Code
W/ Cap	1
W/O Cap	2
For SMT Type only	

Packing option	Code
Tube	1
Tape & Reel	2

W.E.