


615


PIN-Header-Strip-2.00mm pitch -dual boby type

Technical data :

Insulator Material :	High Temperature Thermoplastic,UL 94V-0
Contact:	0.50mm x 0.50mm
Contact Material :	copper alloy
plating:	Au or Sn over Nickel
Insulator resistance :	500 Megohms min.
Dielectric withstanding :	AC 500 V for 1 Minute
Operating Temperature :	-40 ° C to +105 ° C
Max. processing Temp:	230° C for 30-60 seconds.
	260° C for 10 seconds.
Mates with :	136,316,618,618-1,620

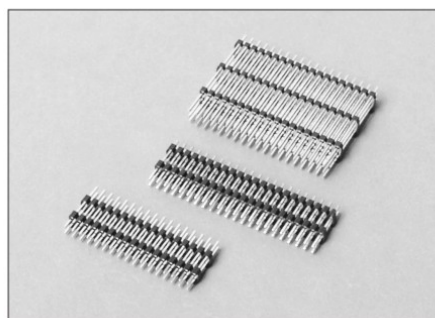

RoHS Compliant

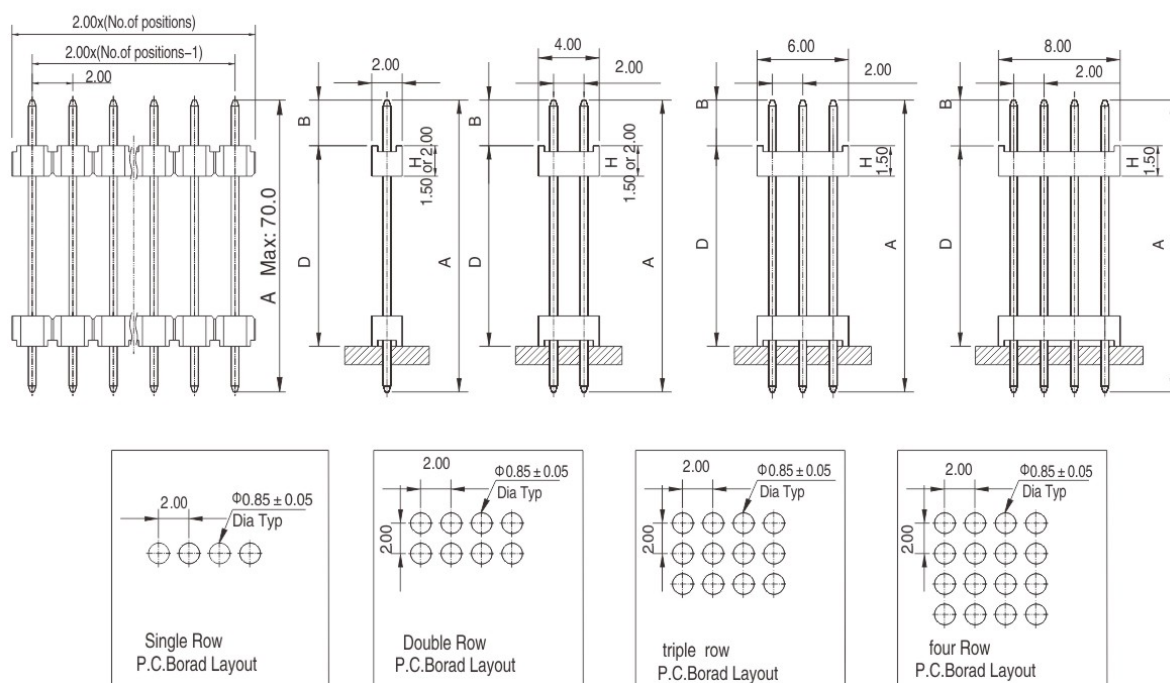

How to order

6	1	5									
Series-Nr.	Terminal version	Profile	Dimension A	Dimension B	Stackes Height	Nr. of Contact.	Plating				

Terminal version	Code
Single Row	10
Double Row	20
triple row	30
four row	40

Profile: H	Code
1.5mm	1
2.0mm	2
triple/four row only for 1.5mm	

Dimension A	Code
14.30	01
8.20	02
9.60	03
13.60	04
14.10	05
15.10	06
17.10	07
19.10	08
21.10	09

Dimension A	Code
11.60	10
15.60	11
10.08	12
28.19	13
As Request	XX
FOR EG. A=11.50	
CODE NR. =11.50	
A Max=70.0mm	

Stackes Height D	Code
Stackes Height	XXX
FOR EG. D=7.50	750
FOR EG. D=6.35	635

Dimension B	Code
4.00	01
1.27	02
3.20	03
As Request	XX
FOR EG. A=11.50	
CODE Nr. =11.50	

Number of contact	Code
Max. 40 poles Single	40
Max. 80 poles double	80
Max. 120 poles triple	120
Max. 160 poles four	160

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

W.E.