



Pin Header–Double Body Type SMT Type 2.0mm pitch

Technical Data :

Insulator Material:	High Temperature Thermoplastic,UL 94V-0
Contact :	0.50x0.50mm.
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	1 Amp
Insulator resistance :	500 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	136,316,618,620

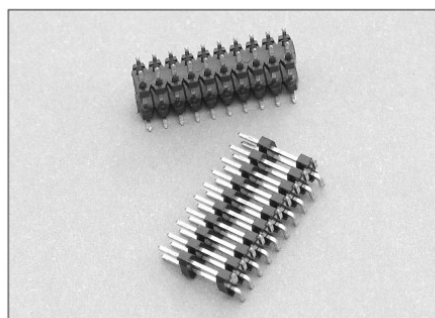

RoHS Compliant

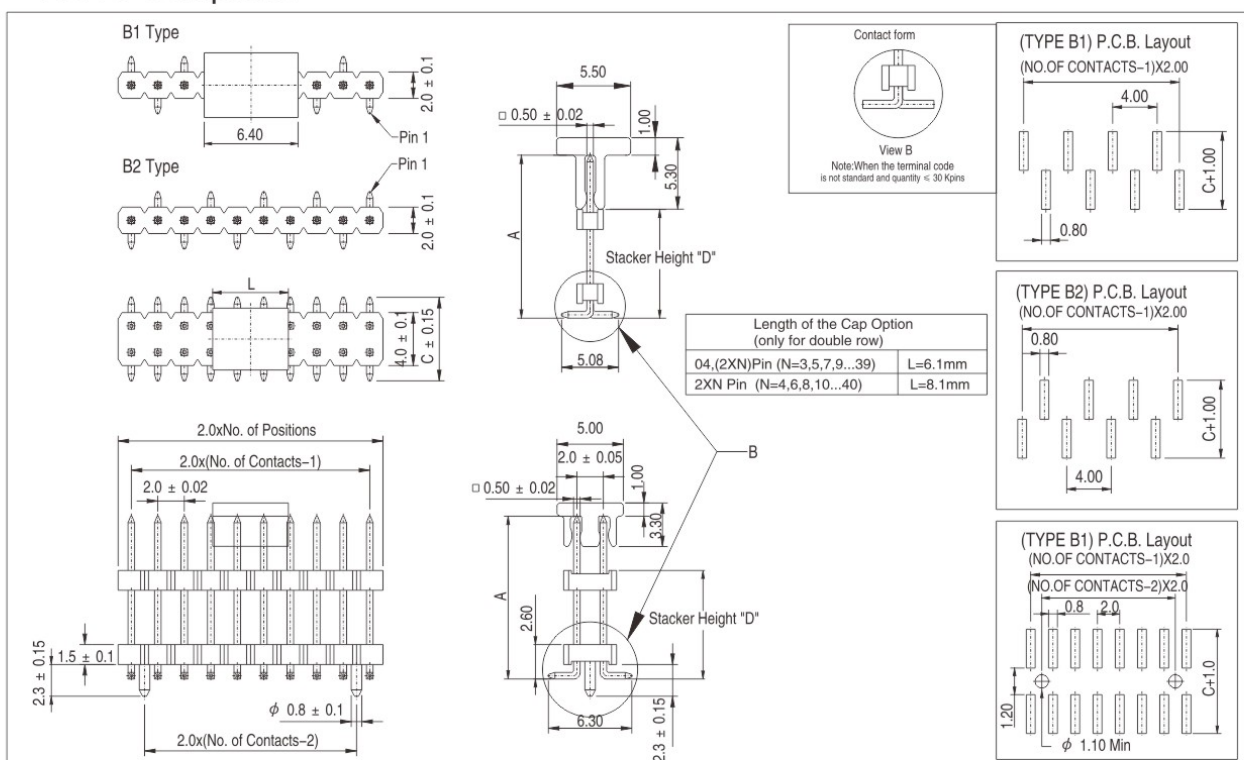

How to order



Number of contact	Code
Double Row 04–80 poles	04–80

Number of Row	Code
Single Row B1 Type	1
Single Row B2 Type	2
Double Row	3

Dimension A	Code
10.70	01
7.85	02
11.86	03
12.37	04
15.37	05
17.35	06
9.86	07
As request	XXX
FOR EG. A=11.25	
CODE Nr.=1125	

Stacker Height D	Code
Stacker Height	XXX
FOR Eg. D=6.35	635

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

Packing option	Code
Tube	1
Tape & Reel	2

Location peg option	Code
W/location peg	10
W/O location peg	00
for double rows only	

Pick & Place pad	Code
W/ Cap	1
W/O Cap	2

W.E.