






Pin Header-Strip 2.0mm Pitch Vertical SMT Type

Technical Data :







Insulator Material:	High Temperature Thermoplastic,UL 94V-0
Contact :	0.50x0.50mm.
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	1 Amp
Insulator resistance :	500 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	136,316,618,618-1,620

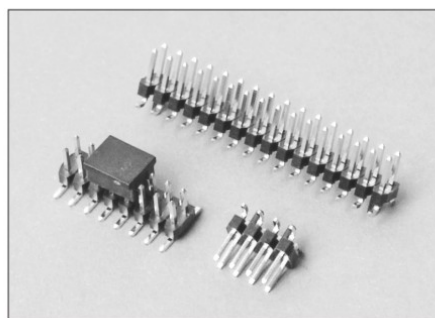

RoHS Compliant

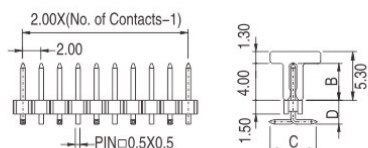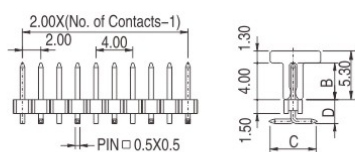

Length of the Cap Option (only for double row)	
04,(2XN)Pin (N=3,5,7,9...39)	L=6.1mm
2XN Pin (N=4,6,8,10...40)	L=8.1mm



How to order

6
1
6

Serie-Nr. Nr. of Contact Nr. of Row Dimension Plating Cap Packing Location peg

Number of contact	Code
SINGLE Row 03-40 poles	03-40
Double Row 04-80 poles	04-80

Nr.of Row	Code
1-single B1 Type	11
2 Single B2 Type	12
3-Double	20

Dimension(mm)			Code
B	C	D	
4.0	7.0	2.6	10
4.0	6.0	2.6	20
As request : XX/XX/XX			
For EX. B=3.2, C=6.5, D=2.8			
CODE Nr = 3/2/6.5/2.8			

Plating option	Code
Gold flash	10
Tin plated	50
Selective gold flash	60
10u" selective gold plated	610
15u" selective gold plated	615
20u" selective gold plated	620
30u" selective gold plated	630

Pick & Place Pad	Code
W/ Cap	1
W/O Cap	2

Packing Option	Code
Tube	1
Tape & Reel	2

Location peg option	Code
W/ locating peg	10
W/O locating peg	00
For Double row only	

W.E.