



617

Pin-header-strips Height 4.0mm, 2.0mm pitch Double Row
Straight & Right Angle

Technical Data :

Insulator Material:	High Temperature Thermoplastic, UL 94V-0
Contact :	0.50x0.50mm.
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	1 Amp
Insulator resistance :	500 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	136, 316, 618, 619, 620

RoHS Compliant

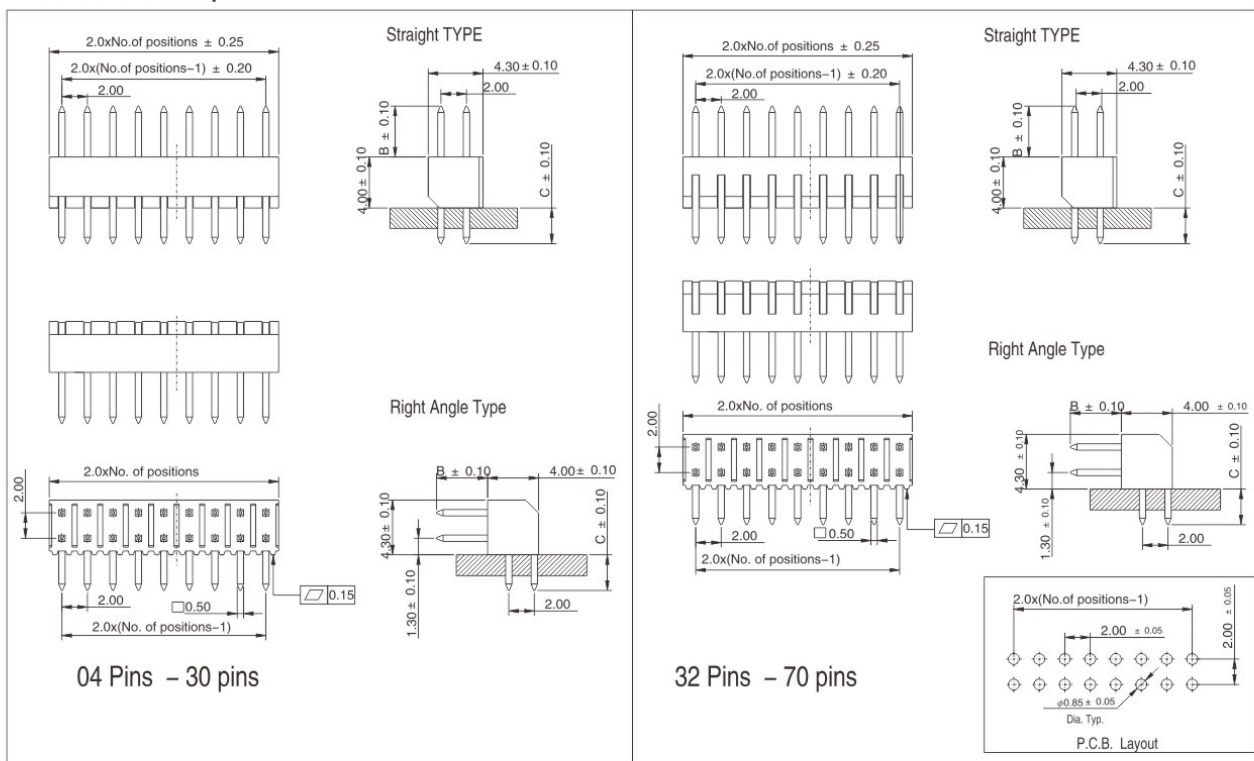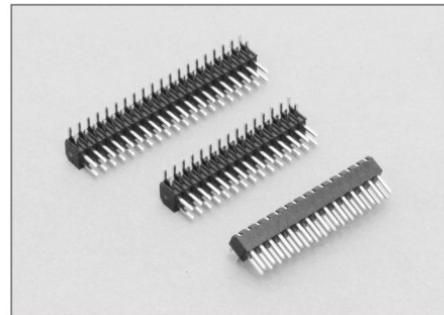

How to order

6	1	7							
Series-Nr.	Nr. of Contacts	Connector Type	Dimension	Plating					

Number of contacts	Code
04-80 poles Double Row 2 X 2 - 2 X 35	04-70

Connector Type	Code
Straight	10
Right Angle	20

Dimension(mm)	Code
B C	
4 2.8	10
As request for eg. B=5.0 C=3.0 Code Nr.=5.0/3.0	XX

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

W.E.