


Ejector Header Dip/SMT Type,pitch 2.00mm

Insulator Material:	High Temperature Thermoplastic,UL 94V-0
Contact :	0.50x0.50mm.
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	1 Amp
Insulator resistance :	500 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40°C to +105°C.
Max. processing Temp:	230°C for 30-60 seconds. 260°C for 10 seconds.
Mates with :	343 IDC socket

Mates with :

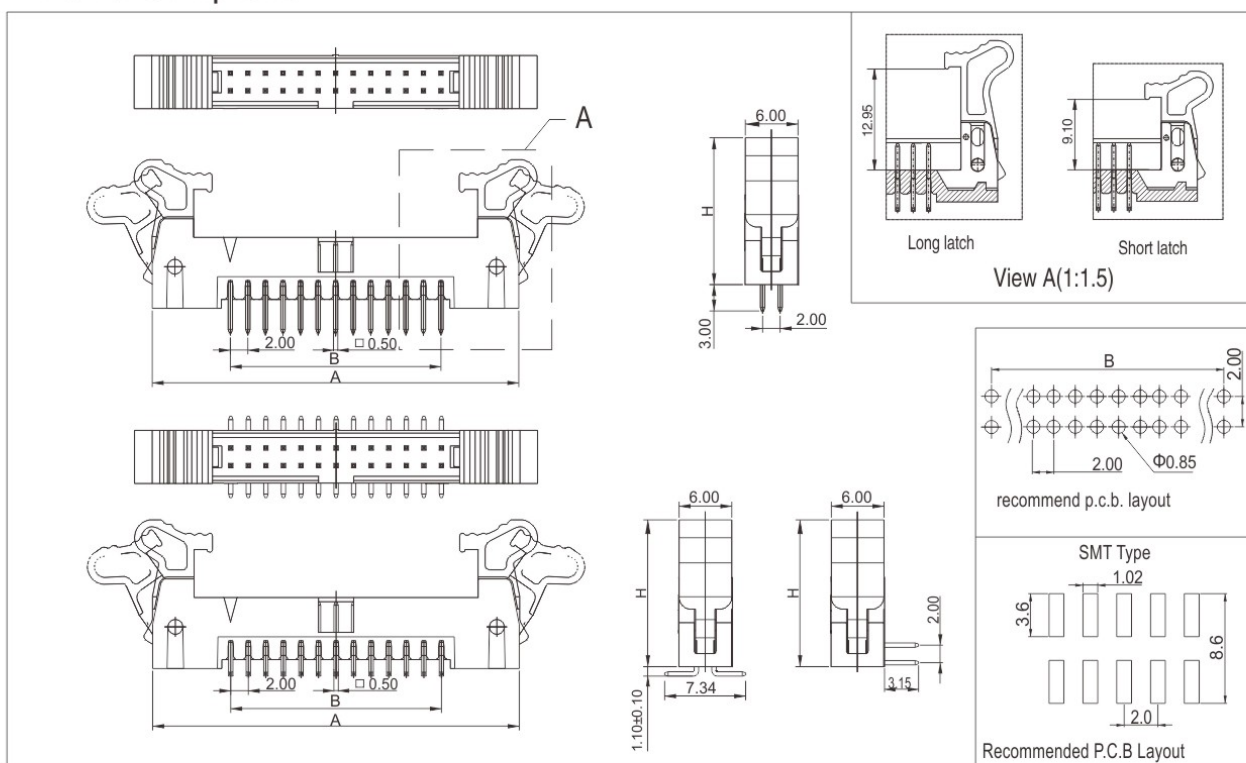

6 3 2 B N — — — —

Series-Nr. Nr. of contact Connect. Type Latch Lever Plating

Nr. of contact	Dimensions(mm)		Nr. of contact	Dimensions(mm)	
	A	B		A	B
10	25.70	8.00	30	45.70	28.00
12	27.70	10.00	32	47.70	30.00
14	29.70	12.00	34	49.70	32.00
16	31.70	14.00	40	55.70	38.00
20	35.70	18.00	44	59.70	42.00
22	37.70	20.00	50	65.70	48.00
24	39.70	22.00	68	83.70	66.00
26	41.70	24.00			

Connector type	Code
Dip solder straight	1
Dip solder 90°	2
SMT Type	3

Latch lever options	Profile:H	Code
With short latches	16.95	10
With long latches	20.80	20

Platingoption	Code
gold plated	10
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

W.E.