


635


Low Profile Header with straight & angle pins 2.0mm pitch

Technical Data :

Insulator Material:	High Temperature Thermoplastic,UL 94V-0
Contact :	0.50x0.50mm.
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	1 Amp
Insulator resistance :	500 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	343, IDC Socket

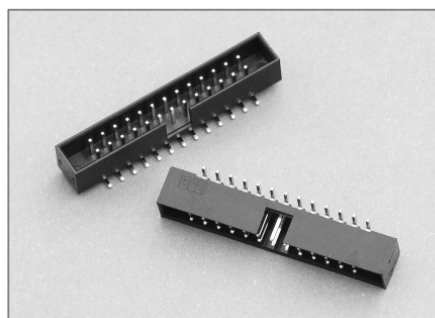

RoHS Compliant

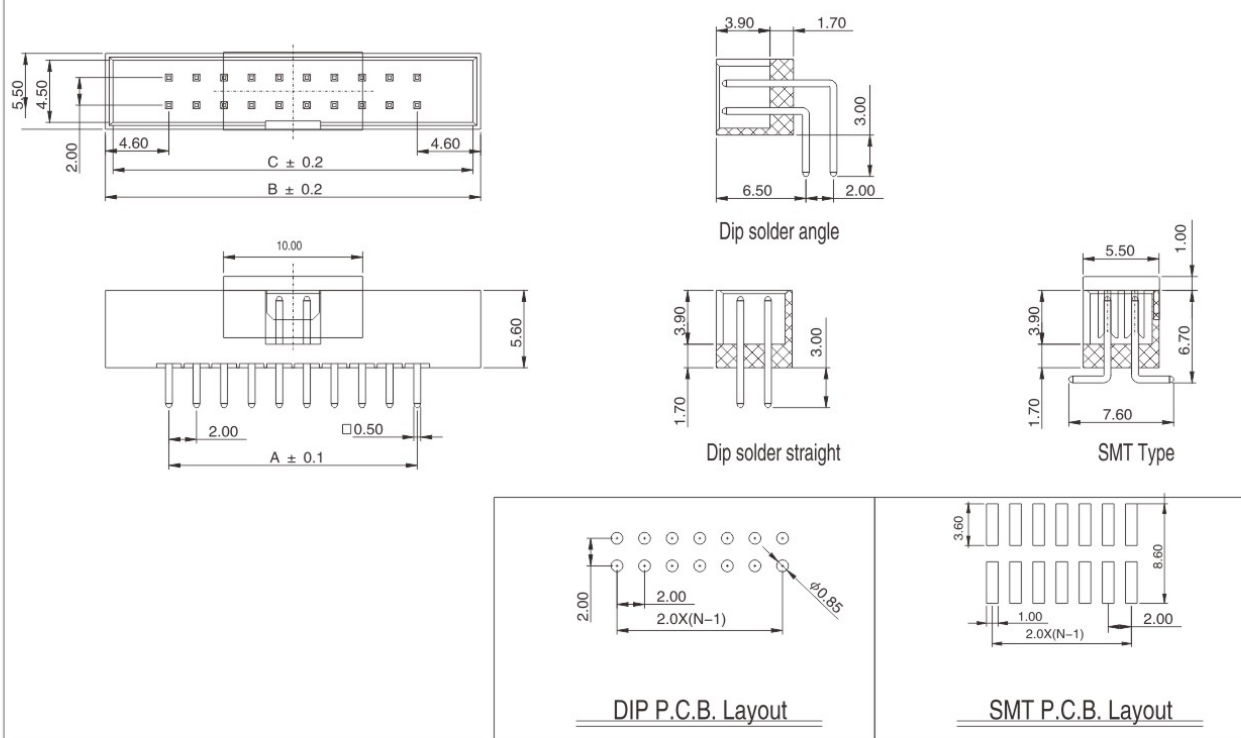

How to order

— — — — — —

Serie-Nr. Nr.of Contact Connector Type Plating Cap Packing

Nr. of contact				Dimensions(mm)				Nr. of contact				Dimensions(mm)			
PIN	A	B	C	PIN	A	B	C	PIN	A	B	C	PIN	A	B	C
6	4.00	13.20	12.10	30	28.00	37.20	36.10	6	4.00	13.20	12.10	30	28.00	37.20	36.10
8	6.00	15.20	14.10	32	30.00	39.20	38.10	8	6.00	15.20	14.10	32	30.00	39.20	38.10
10	8.00	17.20	16.10	34	32.00	41.20	40.10	10	8.00	17.20	16.10	34	32.00	41.20	40.10
12	10.00	19.20	18.10	36	34.00	43.20	42.10	12	10.00	19.20	18.10	36	34.00	43.20	42.10
14	12.00	21.20	20.10	40	38.00	47.20	46.10	14	12.00	21.20	20.10	40	38.00	47.20	46.10
16	14.00	23.20	22.10	44	42.00	51.20	50.10	16	14.00	23.20	22.10	44	42.00	51.20	50.10
20	18.00	27.20	26.10	50	48.00	57.20	56.10	20	18.00	27.20	26.10	50	48.00	57.20	56.10
22	20.00	29.20	28.10	60	58.00	67.20	66.10	22	20.00	29.20	28.10	60	58.00	67.20	66.10
24	22.00	31.20	30.10	64	62.00	71.20	70.10	24	22.00	31.20	30.10	64	62.00	71.20	70.10
26	24.00	33.20	32.10	68	66.00	75.20	74.10	26	24.00	33.20	32.10	68	66.00	75.20	74.10

Connector Type	Code
Dip solder straight	1
Dip solder angle	2
SMT Type	3

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

Cap option	Code
W/ Cap	1
W/O Cap	2
For SMT Type only	

Packing Option	Code
Tube	1
Tape & Reel	2
Tray	3

W.E.