

5.00mm Pitch Mini-Power Terminal, Right Angle Type

Technical Data :

Insulator Material:

High Temperature
Thermoplastic, LCP, UL 94V-0
stamped and formed, Copper Alloy
stamped and formed, Copper Alloy
Au or Tin over Nickel
Matt Sn over Nickel
24.7A

Contact Material:

Clip Material:

Contact Plating:

Clip Plating:

Current Rating :

Voltage Rating:

Operating Temperature :


600VAC/848VDC
-55 °C to +105 °C With Tin
-55 °C to +125 °C With Gold
230 °C for 30–60 seconds.
260 °C for 10 seconds.

Max. processing Temp:

260 °C for 10 seconds.


Mates with :

920

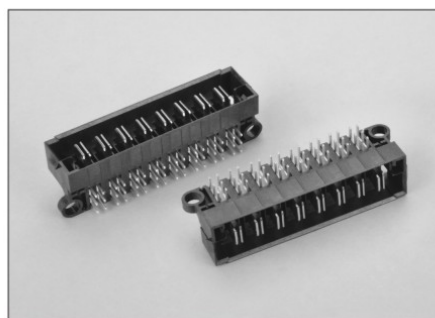


RoHS Compliant

W/Screw Down

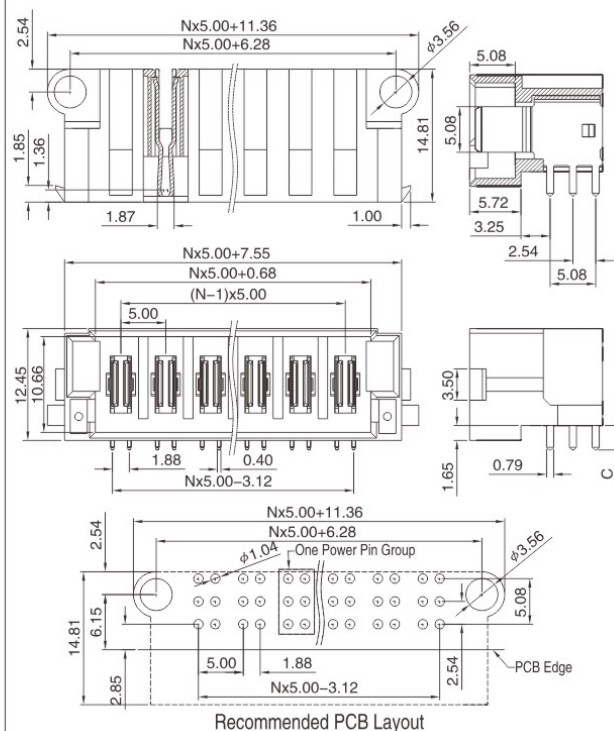

W/Locking Clip

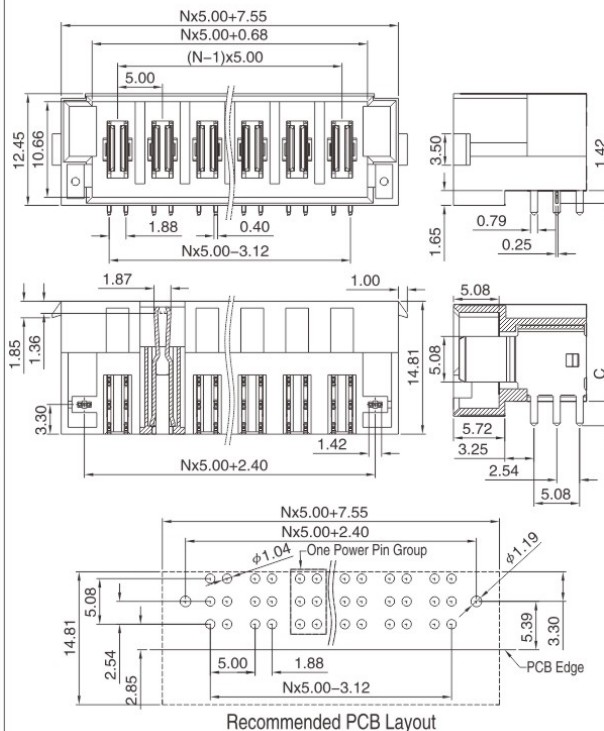

How to order

921———————

Serie-Nr. Nr.of Contact Terminal type Plating Location option Cap Packing

Nr. of contact	Code
02	02
03	03
04	04
06	06
08	08

Terminal type	Code
Dimensions(mm)	
C	
2.72	20
3.52	21
4.32	22

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u" Selective gold plated	610

Location option	Code
W/Locking Clip	20
W/Screw Down	30

Pick&Place Cap	Code
W/O Cap	2

Packing option	Code
Tube	1
Tray	3

W.E.