


158




Economy Female-Headers-2.54mm pitch Height 8.5 mm

Technical Data :

Insulator Material:	High Temperature Thermoplastic,UL 94V-0
Contact :	Brass
Plating:	Au or Sn over Nickel
Current Rating :	3 Amp
Contact resistance:	20 milliohms Max.
Insulator resistance :	1000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute.
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	Pitch 2.54mm, □ 0.635mm male header

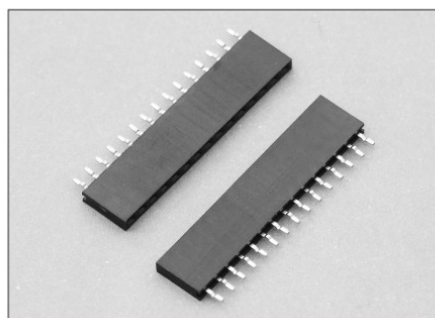

RoHS Compliant

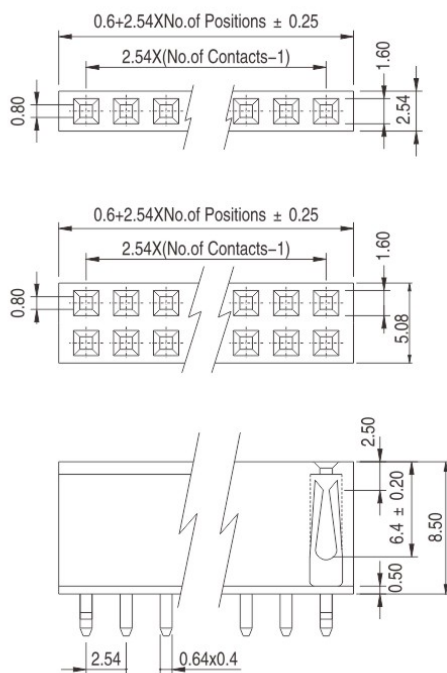

How to order

1	5	8					
Serie-Nr.			Nr.of	Contact	Nr.of Row	Contact	Plating

Number of contact	Code
1 – single max. 40 poles	02-40
2 – Double max. 80 poles	04-80

Number of row	Code
1 – single	1
2 – Double	2

Plating option contact	Code
Gold plated	10
Tin plated	50
Selective gold plated	60
10u"Selective gold plated	610
20u"Selective gold plated	620
30u"Selective gold plated	630

W.E.