


159


Economy Female-Headers-2.54mm pitch Height 8.5 mm SMT Type

Technical Data :

Insulator Material:	High Temperature Thermoplastic,UL 94V-0
Contact :	Brass
Plating:	Au or Sn over Nickel
Current Rating :	3 Amp
Contact resistance:	20 milliohms Max.
Insulator resistance :	1000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute.
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	Pitch 2.54mm, □ 0.635mm male header

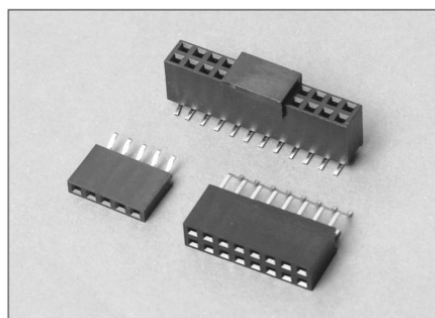

RoHS Compliant

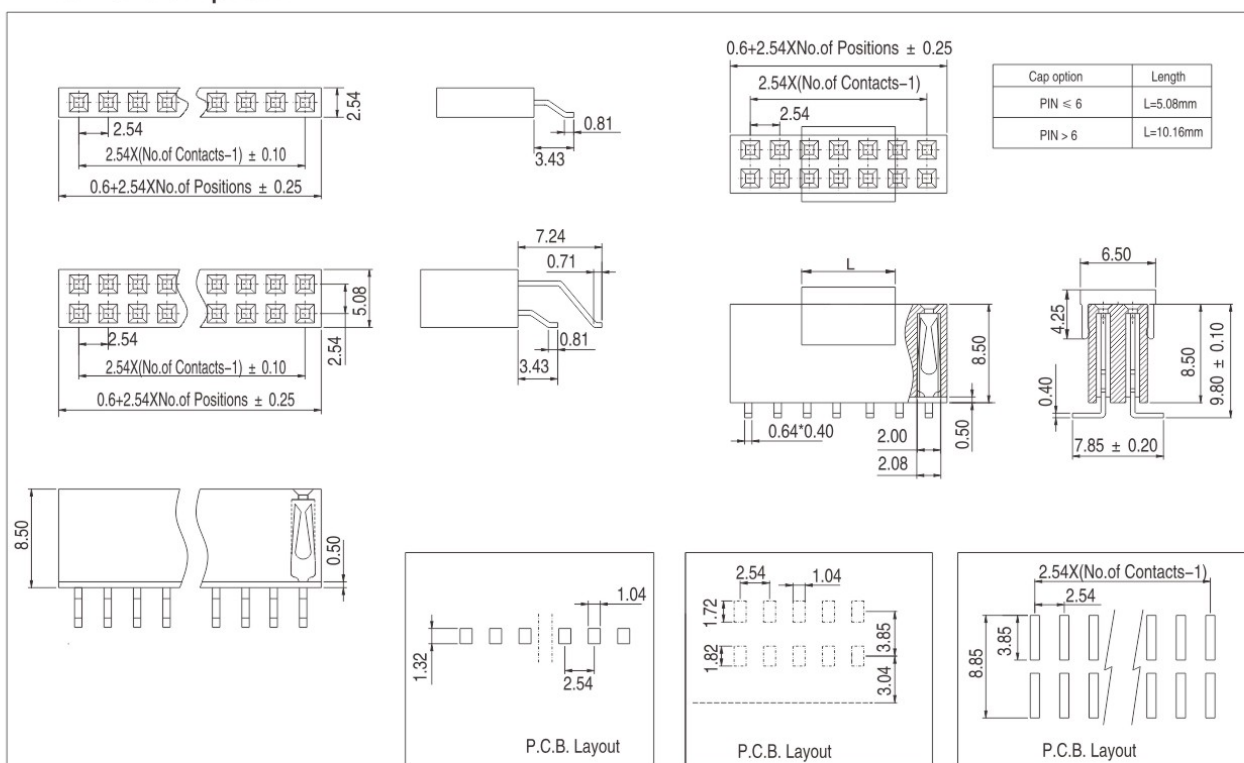

Cap option	Length
PIN ≤ 6	L=5.08mm
PIN > 6	L=10.16mm

How to order

1	5	9								
Serie-Nr.	Nr. of Contact	Nr. of Row	Layout	Contact	Plating	Cap option	Packing			

Number of contact	Code
1 - Single 2-20 poles	02-20
2 - double 4-40 poles	04-40

Number of row	Code
double row	13
single row	14

Layout	Code
Horizontal TYPE	10
Vertical TYPE	20

Plating option contact	Code
Gold plated	10
Tin plated	50
Selective gold plated	60
10u"Selective gold plated	610
20u"Selective gold plated	620
30u"Selective gold plated	630

Cap Option	Code
W/ Cap	1
W/O Cap	2

Packing Option	Code
Tube	1
Tape & Reel	2

W.E.