


159


Economy Female-Headers-2.54mm pitch Height 8.5 mm tail Right angle

Technical Data :

Insulator Material:	High Temperature Thermoplastic, UL 94V-0
Contact :	Brass
Plating:	Au or Sn over Nickel
Current Rating :	3 Amp
Contact resistance:	20 milliohms Max.
Insulator resistance :	1000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute.
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	Pitch 2.54mm, □ 0.635mm male header

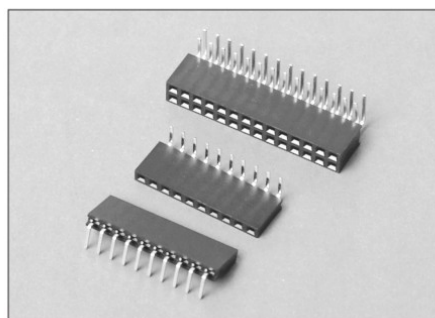

RoHS Compliant

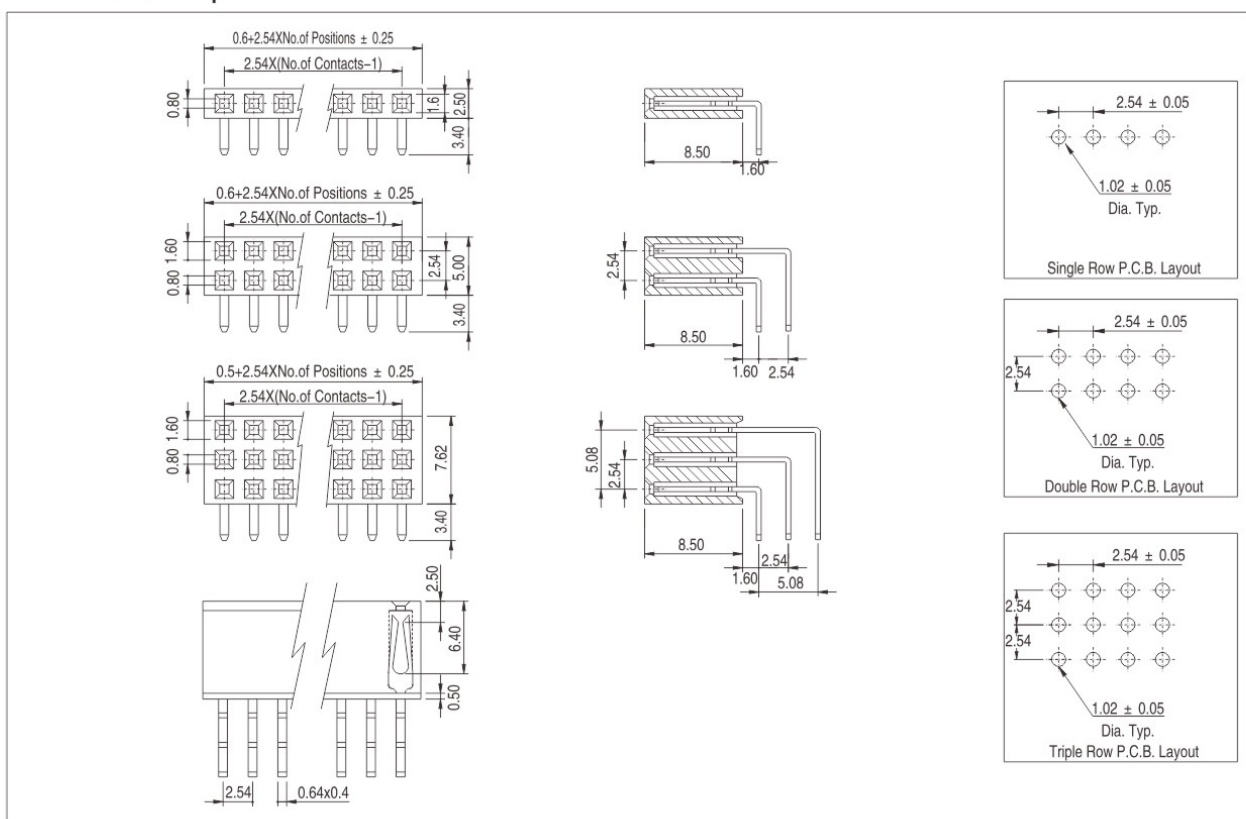

How to order

— —

Serie-Nr. Nr. of Contact Nr. of Row Contact Plating

Number of contact	Code
1 – single max. 40 poles	02-40
2 – double max. 80 poles	04-80
3 – triple max. 96 poles	09-96

Number of row	Code
1 – single R.A.	11
2 – double R.A.	12
3 – triple R.A.	15

Plating option contact	Code
Gold plated	10
Tin plated	50
Selective gold plated	60
10u"Selective gold plated	610
20u"Selective gold plated	620
30u"Selective gold plated	630

W.E.