



Economy Female-Headers-2.0mm pitch

Technical Data :

Insulator Material:	LCP,UL 94V-0
Contact :	stamped and formed,Phosphor Bronze
Plating:	Au or Sn over Nickel
Current Rating :	1 Amp
Contact resistance:	20 milliohms Max.
Insulator resistance :	1000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute.
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	Pitch 2.0mm. □ 0.50mm male header

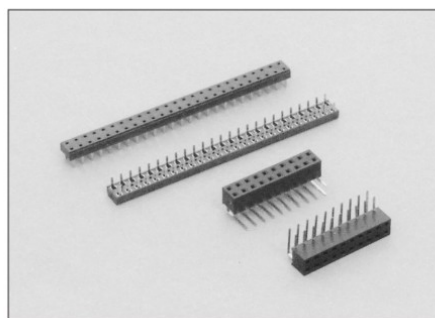

RoHS Compliant

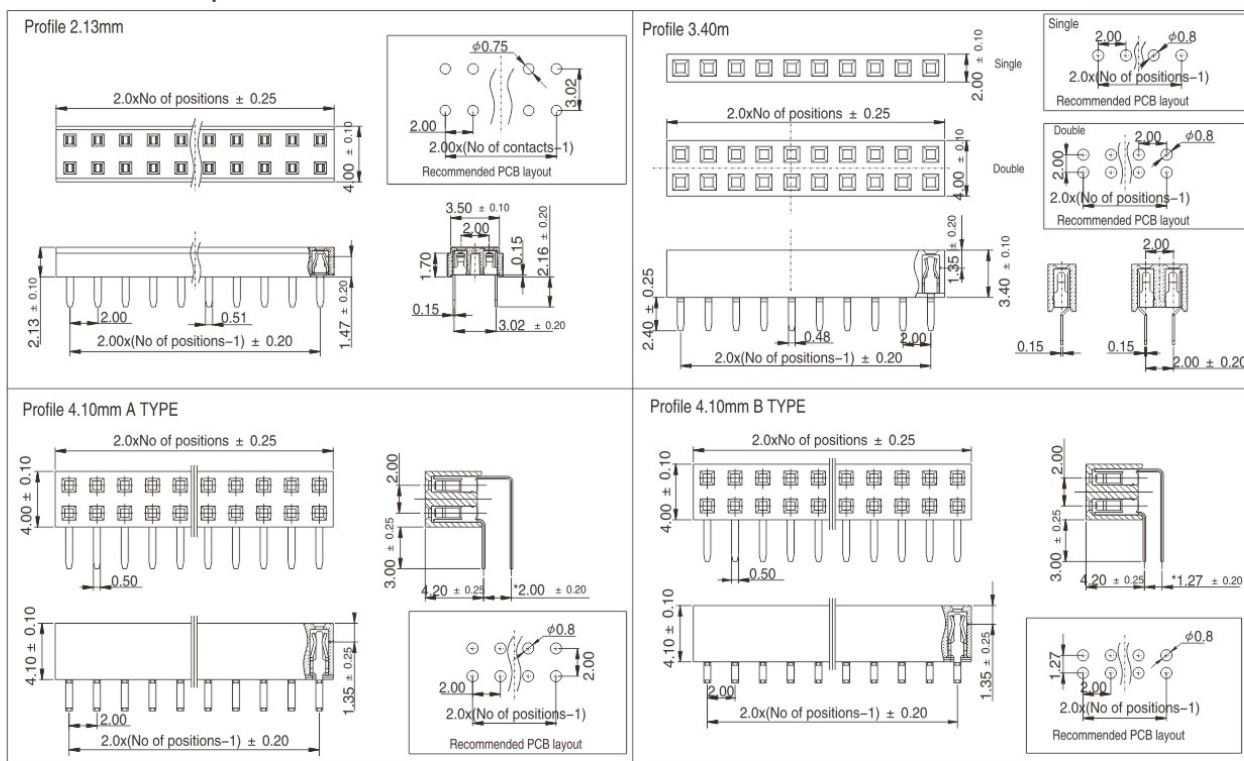

How to order

3 1 6 — 1 — — —
 Serie-Nr. Nr. of Contact Nr. of Row Profile Plating option

Number of contact	Code
Profile 3.40 single	03-40
Profile 2.13double	04-80
Profile 3.40 double	06-80
Profile 4.10 double	04-80

Number of row	Code
Single	1
Double	2

Profile	Code
2.13mm	1
3.40mm	2
4.10mm A TYPE	3
4.10mm B TYPE	4

Plating option	Code
Gold plated	10
Tin plated	50
Selective gold flash plated	60
10U" Selective gold plated	610
20U" Selective gold plated	620
Plating Code: 60,610,620,630 only for profile 3.40,4.10 mm	

W.E.