

343

IDC Socket Connector DIN 41651 Pitch 2.00mm

Technical Data :

Insulator Material: Thermoplastic,UL 94V-0 stamped and formed,Phosphor Bronze

Contact :
Plating: Au or Sn over Nickel

Wire size: 28AWG

Current Rating : 1 Amp

Contact resistance: 20 milliohms Max.

Insulator resistance : 1000 Megohms min.


Dielectric withstanding : AC 500V for 1 Minute.

Operating Temperature: -40°C to +105°C.



Mates with : Pitch 2.0mm □0.50mm male headle

RoHS Compliant

06-50Pins :

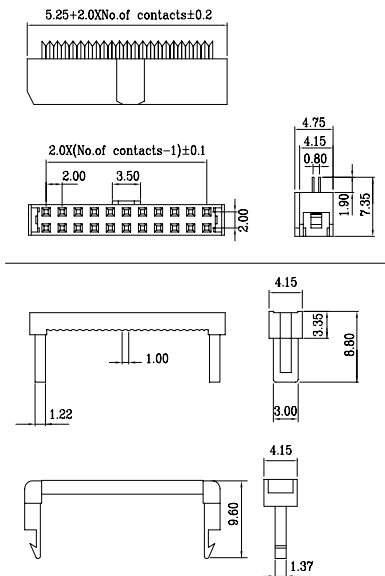

60&64Pins :

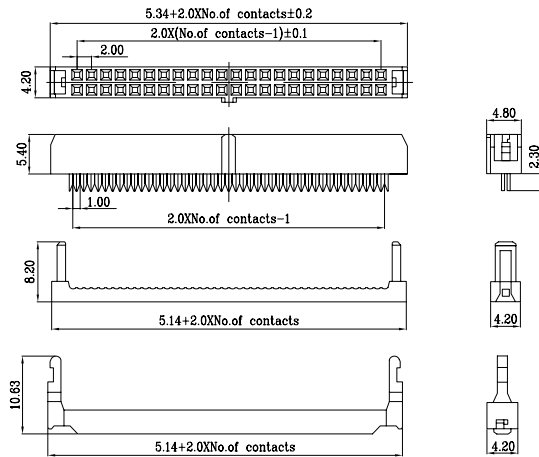

Also Available

How to order

3 4 3 — — — — —
Serie-Nr. Nr. of Contact Cable Clamp Bump Plating

No. of contacts

06,08,10,12,
14,16,18,20,22,
24,26,30,34,40,
44,50,60,64

Cable clamp option	Code
W/O cable clamp	00
W/ cable clamp	10

Central Bump	Code
W/ Bump	1
W/O Bump	2

Plating Option	Code
Gold plated	10
Selective gold plated	60

W.E.