


344



IDC-Printed Connector DIP Spacing 2.00mm

Technical Data :

Insulator Material:	Thermoplastic, UL 94V-0
Contact :	stamped and formed, Phosphor Bronze
Plating:	Au or Sn over Nickel
Wire size:	28AWG
Current Rating :	1 Amp
Contact resistance:	20 milliohms Max.
Insulator resistance :	1000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute.
Operating Temperature:	-40 °C to +105 °C .
Mates with :	Pitch 2.0mm □0.50mm male headle

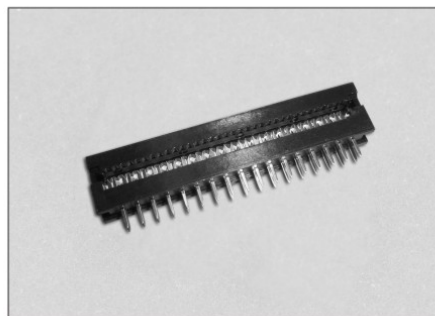

RoHS Compliant

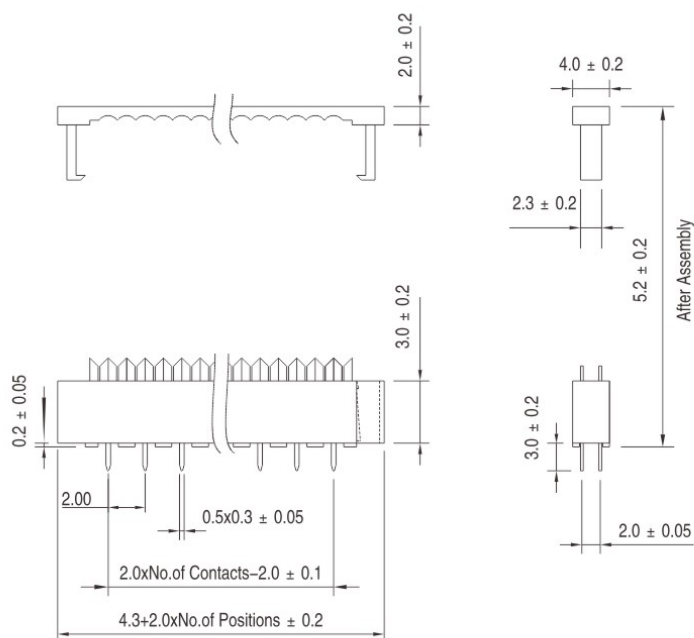

Also Available

How to order

3	4	4	—	□	□	—	□	□
Serie-Nr.				Nr. of Contact			Plating	

Nr. of contact	Code
10	10
12	12
16	16
20	20
24	24
26	26
30	30
34	34
40	40
44	44
50	50

Plating option	Code
Tin Plated	50
Selective gold plated	60

W.E.