


620




Female Header DUAL Entry Type 2.0mm pitch

Technical Data :

Insulator Material:	High Temperature Thermoplastic, UL 94V-0
Contact :	stamped and formed, Phosphor Bronze
Plating:	Au or Sn over Nickel
Current Rating :	1 Amp
Contact resistance:	20 milliohms Max.
Insulator resistance :	1000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute.
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	Pitch 2.0mm , □ 0.50mm male header.

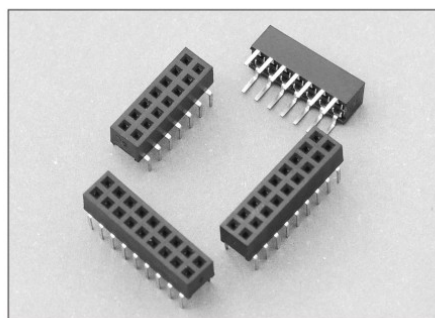

RoHS Compliant

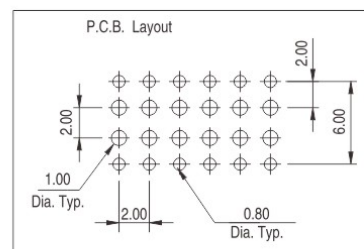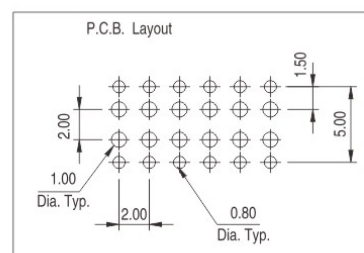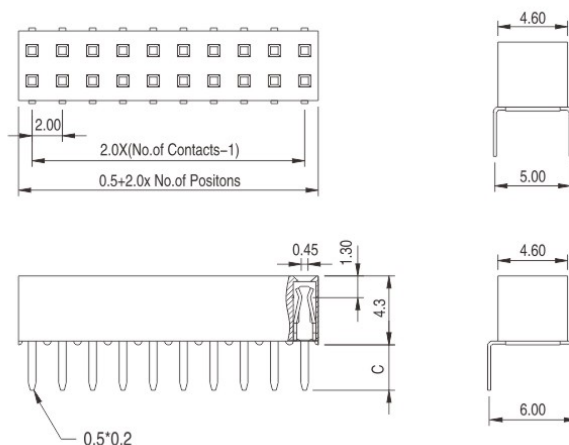

How to order

6	2	0					
Serie-Nr.			Nr. of	Contact	Spacing	Plating	

Number of contact	Code
Double Max.80 pines	06-80

Spacing option	Code
5.0 mm C=3.6	1
6.0 mm C=3.0	2

Plating option	Code
Gold plated	10
Tin plated	50
Selective gold flash plated	60
10U" Selective gold plated	610
20U" Selective gold plated	620
30U" Selective gold plated	630

W.E.