


620


Female Header DUAL Entry Type 2.0mm pitch

Technical Data :

Insulator Material:	High Temperature Thermoplastic, UL 94V-0
Contact :	stamped and formed, Phosphor Bronze
Plating:	Au or Sn over Nickel
Current Rating :	1 Amp
Contact resistance:	20 milliohms Max.
Insulator resistance :	1000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute.
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	Pitch 2.0mm , □0.50mm male header.

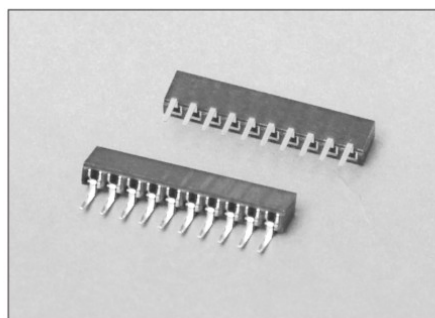

RoHS Compliant

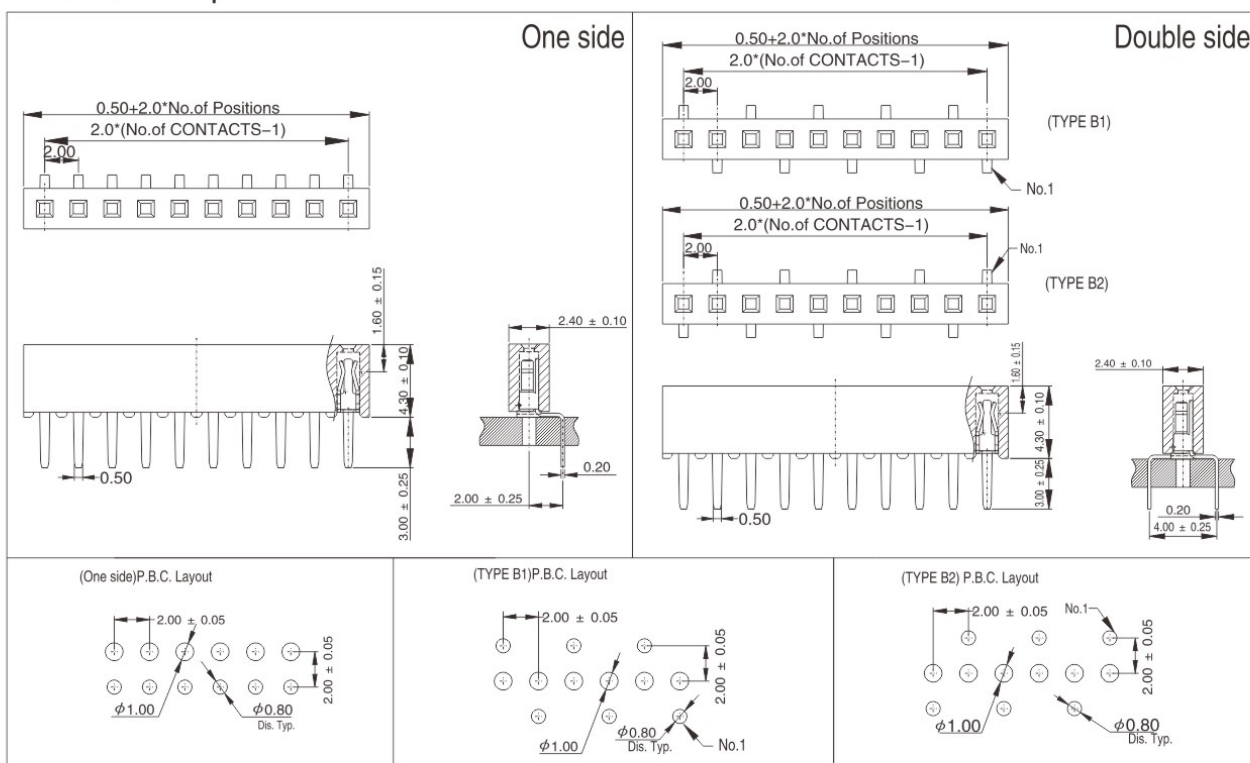

How to order

6	2	0							
Serie-Nr.			Nr. of Contact		Spacing		Plating		Packing

Number of contact	Code
Single max.40 poles	03-40

Spacing option	Code
Single row one side	3
Single row Double side Type B1	4
Single row Double side Type B2	5

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10U" Selective gold plated	610
20U" Selective gold plated	620
30U" Selective gold plated	630

W.E.