



Female On Board Side Entry Type 1.27 Pitch(Mini-Match connector)

Technical data :

Insulator:	High Temperature Thermoplastic,UL 94V-0.
Color Insulator:	Red
Contact:	Phosphor bronze
Plating :	Au or Tin over nickel
Operating temperature:	-40° C to +105° C
Current rating:	1 Amp
Contact resistance:	20 milliohms Max.
Insulation resistance:	1000m min. at DC 100V
Dielectric withstanding:	AC 500V for 1 minute
Max. processing Temp:	230° C for 30-60 seconds.
(Material:PA6T)	260° C for 10 seconds.

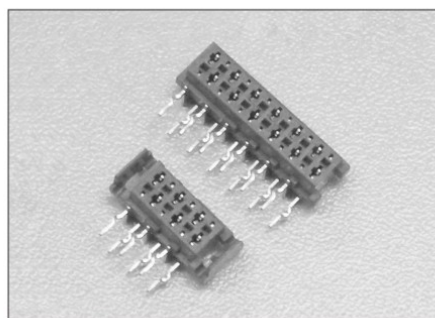

RoHS Compliant

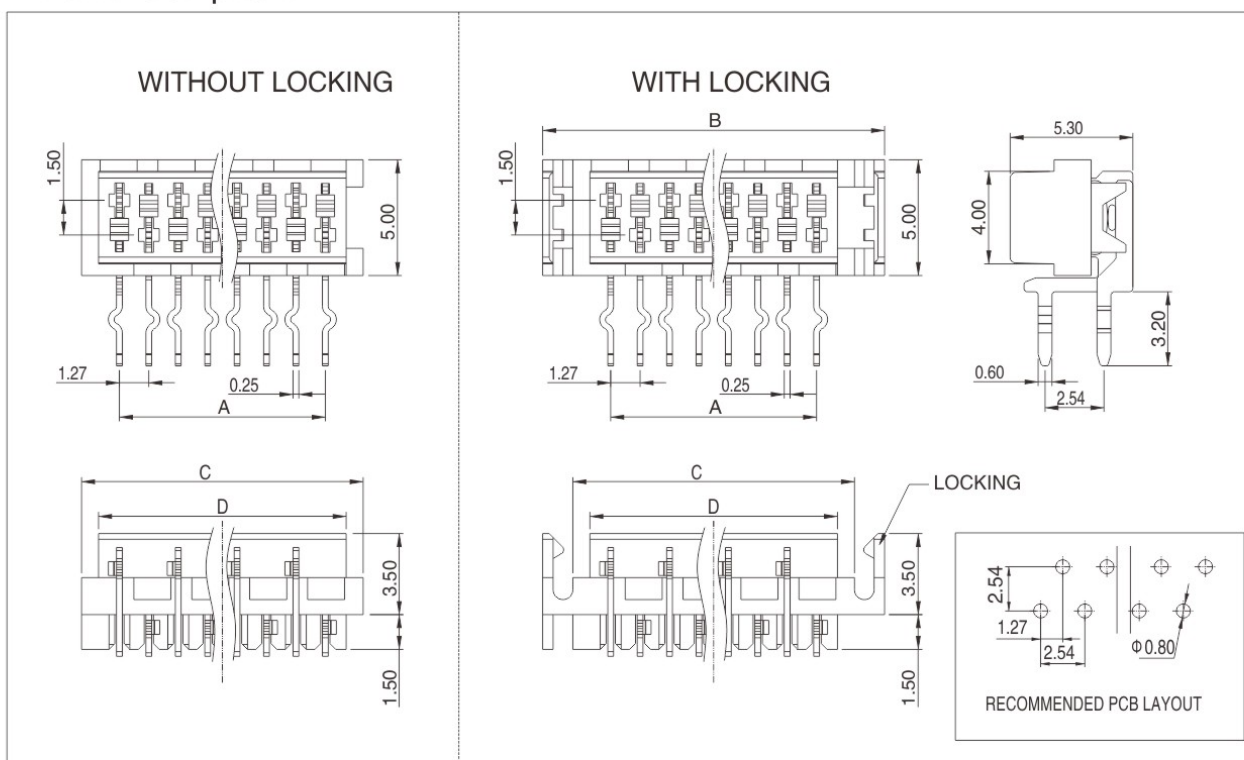

How to order

6 **6** **0** — **B** — □ □ — □ □ — □ □ — □ □ — □ □
 serie-nr Nr.of contact Plating Locking Packing material

Nr.Of contact	DIMENSIONS			
	A	B	C	D
04	3.81	9.70	7.10	5.60
06	6.35	12.20	9.70	8.14
08	8.89	14.70	12.20	10.68
10	11.43	17.30	14.70	13.22
12	13.97	19.80	17.30	15.76
14	16.51	22.40	19.80	18.30
16	19.05	24.90	22.40	20.84
18	21.59	27.40	24.90	23.38
20	24.13	30.00	27.40	25.92
24	29.21	35.10	32.50	31.00

Plating option	Code
Full gold flash plated	10
Tin plated	50

Locking option	Code
W/Locking	A
W/O locking	B

Packing option	Code
Tube	1
Tape&Reel	2

material	Code
PA6T	1

W.E.