


660E



Paddle Board Type 1.27 Pitch(Mini-Match connector)

Technical data :



Insulator:	Thermoplastic Polyester,PBT rated UL94-V0
Color Insulator:	Red
Contact:	Phosphor bronze
Plating :	Tin over nickel
Operating temperature:	-40 °C to +105 °C
Current rating:	1 Amp
Contact resistance:	20 milliohms Max.
Insulation resistance:	1000m min. at DC 100V
Dielectric withstanding:	AC 500V for 1 minute
Wire size:	28AWG

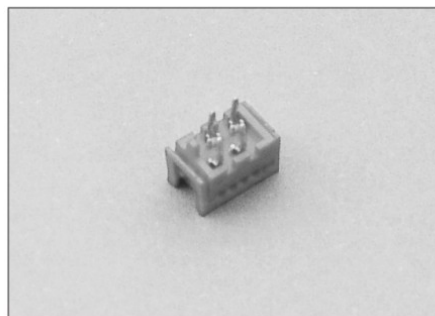

RoHS Compliant

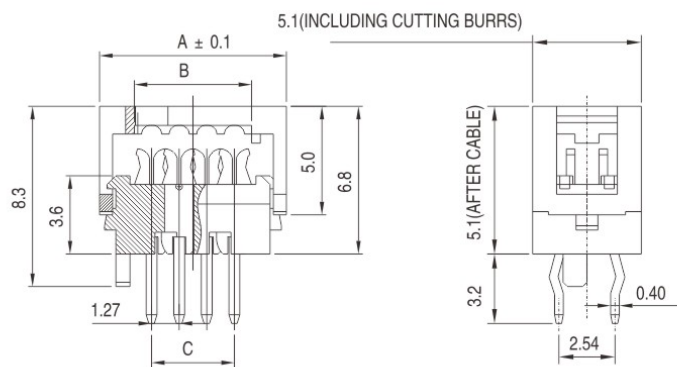

Also Available

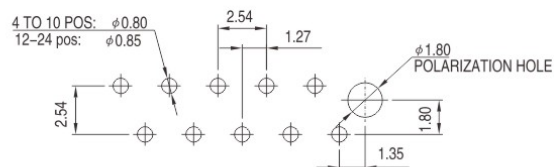

RECOMMENDED PCB LAYOUT

How to order

6	6	0	—	E	—	—	—	—	—
serie-nr				Nr.of contact		Plating		Packing	

Nr.Of contact	DIMENSIONS		
	A	B	C
04	8.6	5.4	3.81
06	11.1	8.0	6.35
08	13.6	10.5	8.89
10	16.2	13.0	11.43
12	18.7	15.6	13.97
14	21.3	18.1	16.51
16	23.8	20.7	19.05
18	26.3	23.2	21.59
20	28.9	25.7	24.13
24	34.0	30.8	29.21

Plating option	Code
Tin plated	50
Selective gold flash plated	60

Packing option	Code
Tube	1

W.E.