


139,140

IDC Connector DIP Type & Printed Circuit Type Pitch 2.54 mm


Technical Data :

Insulator Material:	Thermoplastic,UL 94V-0
Contact :	stamped and formed,Phosphor Bronze
Plating:	Au or Sn over Nickel
Wire size:	28AWG
Current Rating :	3 Amp
Contact resistance:	20 milliohms Max.
Insulator resistance :	1000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute.
Operating Temperature:	-40 °C to +105 °C .

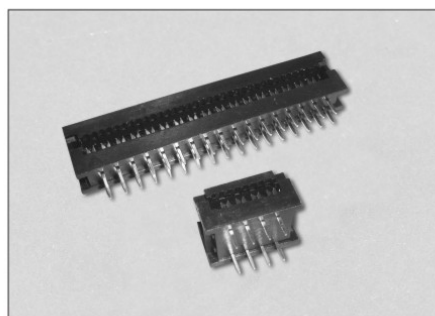


RoHS Compliant

139

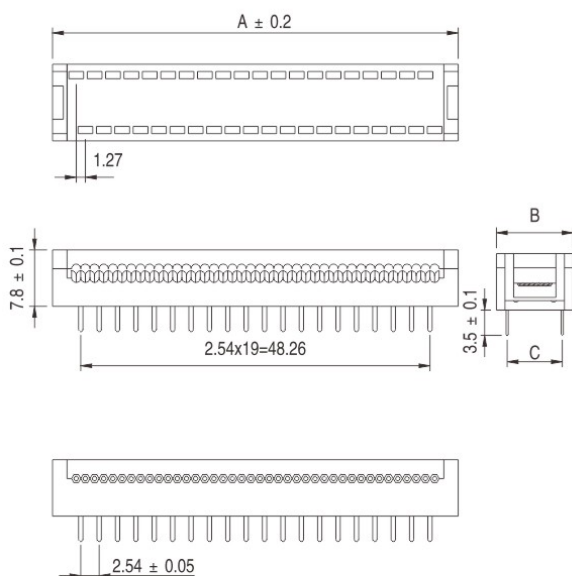

140

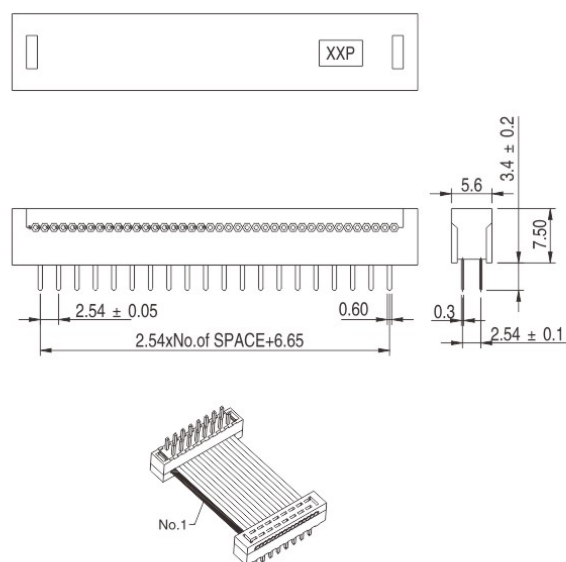

Also Available

How to order

— —

Serie-Nr. Terminal Plating

Nr. of contact	Dip spacing	Dimensions(mm)			Code
		A	B	C	
08	7.62mm	15.40	10.60	7.62	083
10	7.62mm	17.95	10.60	7.62	103
14	7.62mm	23.03	10.60	7.62	143
16	7.62mm	25.57	10.60	7.62	163
18	7.62mm	28.11	10.60	7.62	183
20	7.62mm	30.65	10.60	7.62	203
24	7.62mm	35.73	10.60	7.62	243
40	7.62mm	56.06	10.60	7.62	403
24	15.24mm	35.73	18.20	15.24	246
28	15.24mm	40.81	18.20	15.24	286
40	15.24mm	56.06	18.20	15.24	406

Plating Option	Code
Selective gold plated	60

How to order

— —

Serie-Nr. Terminal Plating

Nr. of contact
08,10,14,16,18,20
24,26,28,30,34,40
50,60,64

Plating Option	Code
Tin Plated	50
Selective gold plated	60

W.E.