


622


High-Density Female Headers Height 8.5mm-Economy Version
2.54mm pitch

Technical Data :

Insulator Material:	High Temperature Thermoplastic, UL 94V-0
Contact :	Brass
Plating:	Au or Sn over Nickel
Current Rating :	1 Amp
Contact resistance:	20 milliohms Max.
Insulator resistance :	1000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute.
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	Pitch 2.54mm, □ 0.635mm male header

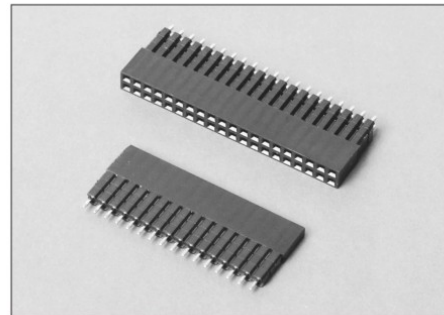

RoHS Compliant

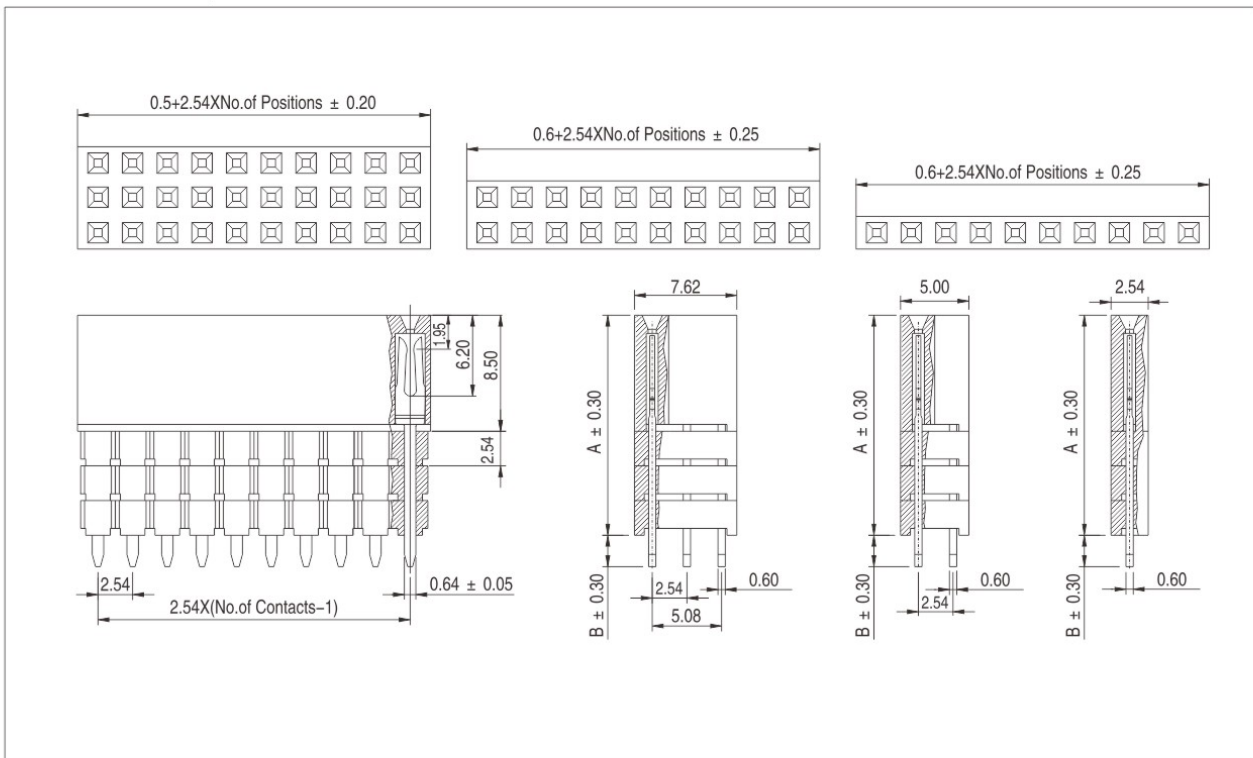

How to order



Number of contact	Code
1 - Single max. 40 poles	03-40
2 - Double max. 80 poles	06-80
3 - Triple max. 96 poles	09-96

Number of Row	Code
1 - Single Row	1
2 - Double Row	2
3 - Triple Row	3

Dimension		Code
A	B	
11.05	2.30	10
11.05	7.35	20
11.05	12.20	30
13.59	4.85	40
13.59	9.65	50
16.13	2.30	60
16.13	7.10	70
18.67	4.60	80
21.21	2.06	90

Plating option	Code
Gold plated	10
Tin plated	50
Selective gold plated	60
10u*Selective gold plated	610
20u*Selective gold plated	620
30u*Selective gold plated	630

W.E.