



## D-Sub-Connector High-density Dip Solder straight

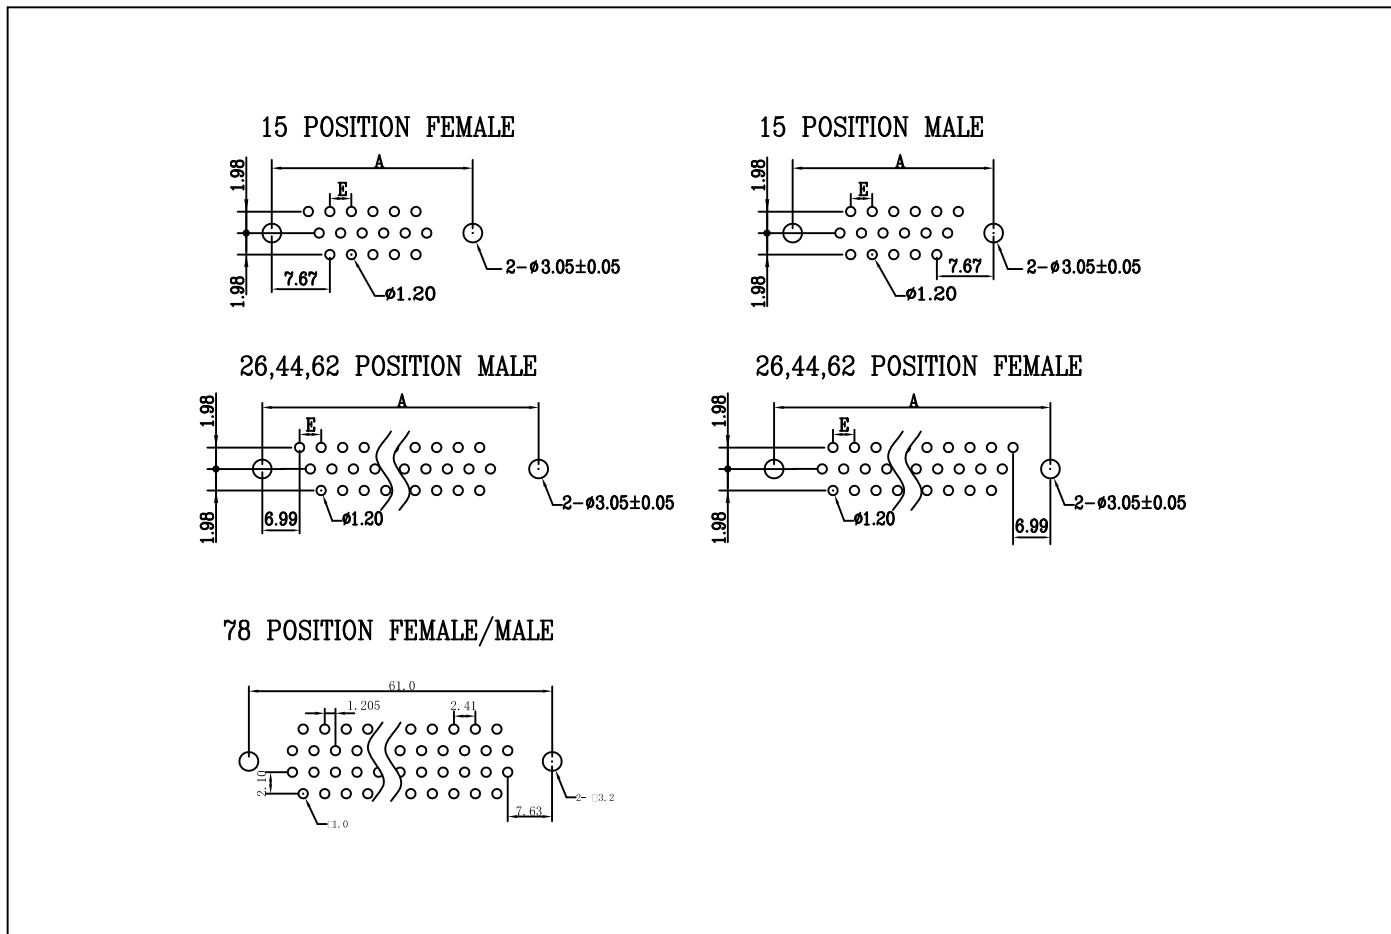

### How to order



Nr. of contact	Dimension (Plug connector)				
	A	B	C	D	E
15	25.00	30.80	16.92	19.20	2.29
26	33.32	39.20	25.25	27.70	2.29
44	47.04	53.10	38.96	41.10	2.29
62	63.50	69.40	55.42	57.30	2.41

Nr. of contact	Dimension (Socket connector)				
	A	B	C	D	E
15	25.00	30.80	16.30	19.30	2.29
26	33.32	39.20	24.60	27.70	2.29
44	47.04	53.10	38.30	41.10	2.29
62	63.50	69.40	54.80	57.30	2.41

Terminal Type	Code
Plug	1
Socket	2

Shell plating		Code
Front shell	Rear shell	
Ni plating	Tin plating	
Ni plating	Ni plating	40

Mounting method	Code
Standard through hole ø3.05mm	B00
Riveted with UNC 4-40 thread insert 4.0mm Top shell	B01
Riveted with UNC 4-40 thread insert 4.0mm Bottom shell	B02
Riveted with UNC 4-40 thread insert 5.8mm Top shell	B03
Riveted with UNC 4-40 thread insert 5.8mm Bottom shell	B04
Riveted with UNC 4-40 thread Board lock 6.0mm	B05
Riveted with UNC 4-40 thread Board lock 7.3mm	B06
Riveted with UNC 4-40 thread insert 2.5mm on Top shell	B10
Riveted with UNC 4-40 thread insert 2.5mm on Bottom shell	B11
Riveted with UNC 4-40 thread insert 3.8mm on Top shell	B12
Riveted with UNC 4-40 thread insert 3.8mm on Bottom shell	B13

Plating Option	Code
Full gold Flash plating	10
Selective gold flash plating	60
5u" selective gold plating	05
15u" selective gold plating	15
30u" selective gold plating	30

Hexagonal bolt Option	Code
Loose HEX.Screws 4.8x11.8	10
Fixed HEX.Screws 4.8x11.8	20
Loose HEX.Screws 5.8x12.0	30
Fixed HEX.Screws 5.8x12.0	40
NON-Accessories	50

Insulator color	Code
White	1
Black	2
Gray	3
Blue	4

Please refer page 24-25 for mounting option

W.E.