115

D-Sub-Connector Crimp-type acc.

Technical :

Material shell	steel, tin plating or nickel plating
Insulator	Thermoplastic polyester
Buming properties	Self extinguishing to UL94V0
Contact	Phosphor bronze
Contact surface	Gold plated over nickel
Operating temperature	-55°C to+125°C

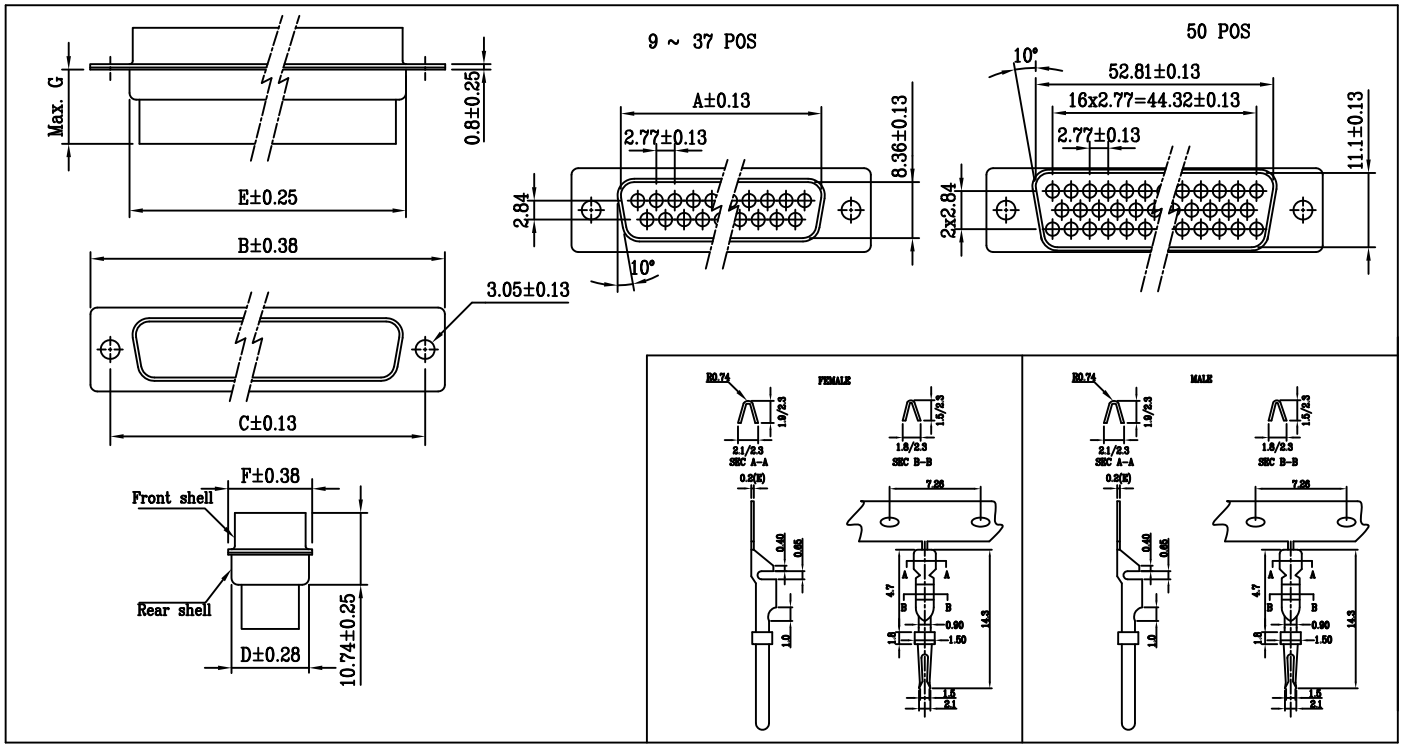

How to order

1	1	5	—			—		—			—			—			—	
Serie-Nr.				Nr.of contact			Plug /Socket		Plating			Shell			Mounting method			Bolt option

Nr. of contact	Dimension (Pin connector)						
	A	B	C	D	E	F	G
9	16.92	30.81	24.99	0.76	19.28	12.55	10.72
15	25.25	39.14	33.32	0.76	27.51	12.55	10.72
19	30.73	44.70	38.81	0.76	33.03	12.55	10.72
23	36.22	50.26	44.30	0.99	38.54	12.55	10.72
25	38.96	53.04	47.04	0.99	41.30	12.55	10.72
37	55.42	69.32	63.50	0.99	51.71	12.55	10.72
50	52.81	66.93	61.11	0.99	55.32	15.37	13.56

Nr. of contact	Dimension (Socket connector)						
	A	B	C	D	E	F	G
9	16.33	30.81	24.99	0.76	19.28	12.55	10.72
15	24.66	39.14	33.32	0.76	27.51	12.55	10.72
19	30.15	44.70	38.81	0.76	33.03	12.55	10.72
23	35.64	50.26	44.30	0.99	38.54	12.55	10.72
25	38.38	53.04	47.04	0.99	41.30	12.55	10.72
37	54.84	69.32	63.50	0.99	51.71	12.55	10.72
50	52.43	66.93	61.11	0.99	55.32	15.37	13.56

Terminal Type	Code
Plug	1
Socket	2

Shell plating		Code
Front shell	Rear shell	
Ni plating	Tin plating	30
Ni plating	Ni plating	40

Plating Option	Code
Selective gold flash plated	60
15u" Selective gold plated	15
30u" Selective gold plated	30

Hexagonal bolt Option	Code
Loose HEX.Screws 4.8x11.8	10
Fixed HEX.Screws 4.8x11.8	20
Loose HEX.Screws 4.8x11.8	30
Fixed HEX.Screws 5.8x12.0	40
NON-Accessories	50

Mounting method	Code
Standard through hole ø3.05mm	B00
Riveted with UNC 4-40 thread insert 4.0mm Top shell	B01
Riveted with UNC 4-40 thread insert 4.0mm Bottom shell	B02
Riveted with UNC 4-40 thread insert 5.8mm Top shell	B03
Riveted with UNC 4-40 thread insert 5.8mm Bottom shell	B04
Riveted with UNC 4-40 thread Board lock 6.0mm	B05
Riveted with UNC 4-40 thread Board lock 11.0mm	B07

Please refer page 24-25 for mounting option

IF you require contact only
Please Put xx in the bracket
(Nr.of contact) & omit
The code No.after plating option

W.E.