

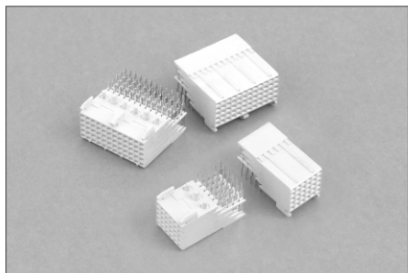
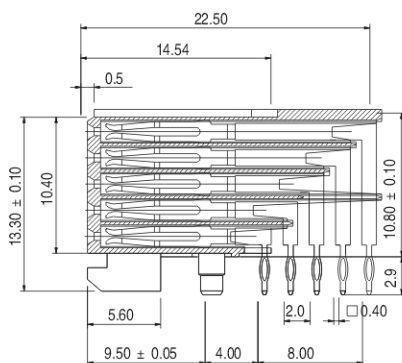


Female signal right angle Solder Pin& press-fit,wide body – 5 ROWS




Features


- Grid at 2 mm spacing(0.079inch)
- Tails fit into $\phi 0.7\text{mm}$ nominal hole size
- Stackable end to end without contact loss togetherwith other moduies
- Modular flexible system
- Fixation pegs in each 12 mm module
- Recommended fixing principle s provided with forced fit pegs
- 3.2 mm PCB thickness cannot be accomodated
- Polarzation by design
- Material: LCP(SMT compatible)
- Standard plating:gold over nickel
- Please refer to page 1 for complete parts number coding




Press-fit pin

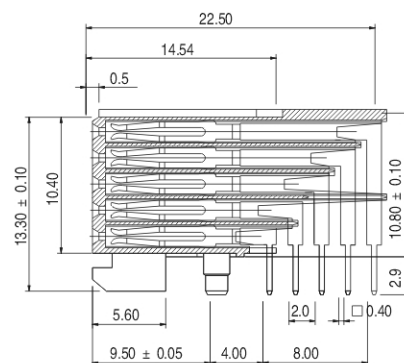

Solder pin



Detail A

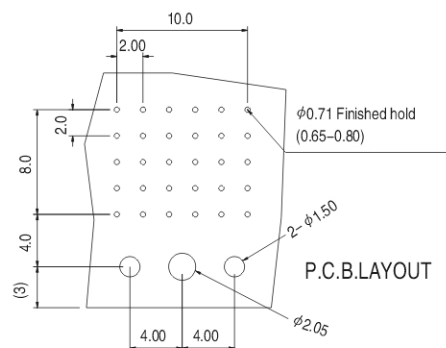

Ordering Information

No.of contact			30		60		120		240	
Termination Type			Solder	Press Fit	Solder	Press Fit	Solder	Press Fit	Solder	Press Fit
Forced Fit Peg	Termination Length	Plating	Parts Number							
3.0mm	2.9mm	10u"	1688-S-30 F10R01AP1	1688-P-30 F10R01AP1	1688-S-60 F10R01AP1	1688-P-60 F10R01AP1	1688-S-120 F10R01AP1	1688-P-120 F10R01AP1	1688-S-240 F10R01AP1	1688-P-240 F10R01AP1
Hot Riveting										
5.2mm	2.9mm	10u"	1688-S-30 F10R01AR1		1688-S-60 F10R01AR1		1688-S-120 F10R01AR1		1688-S-240 F10R01AR1	