

136

Elevated female header 2.0mm pitch H6.35 Dip 180 Type







Technical Data :

Insulator Material: High Temperature Thermoplastic, UL 94V-0
 Contact : stamped and formed, Phosphor Bronze
 Plating: Au or Sn over Nickel
 Current Rating : 1 Amp
 Contact resistance: 20 milliohms Max.
 Insulator resistance : 1000 Megohms min.
 Dielectric withstanding : AC 500V for 1 Minute.
 Operating Temperature: -55°C to +105°C.
 Max. processing Temp: 230°C for 30-60 seconds.
 260°C for 10 seconds.

Mates with : Pitch 2.0mm, □0.50mm male header

RoHS Compliant

DIP 180° TYPE

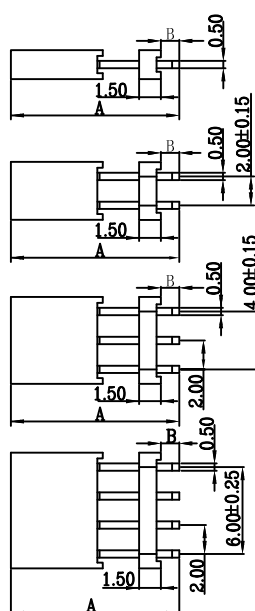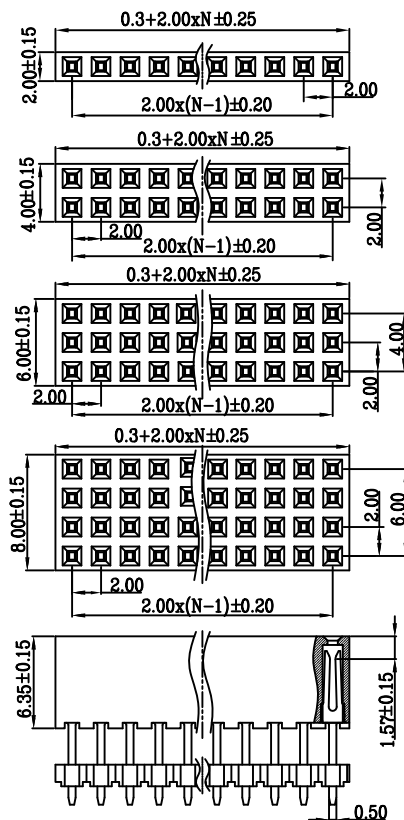

How to order

1 3 6 - - - -
 Serie-Nr. Nr. of Contact. Connector Type Nr. of Row Dimension Plating

Number of contact	Code
single row	02-40
double row	04-80
triple row	06-120
four row	08-160
Nr. of Row	Code
single row	10
double row	20
triple row	30
four row	40

Connector Type	Code
Elevated Dip 180° Type	11
Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

Dimension	Code	B MAX
A B		
9.35 1.27	10	1.50
11.63 1.27	20	3.78
12.34 1.27	30	4.49
21.59 1.27	40	13.74
13.35 1.27	50	5.50
17.35 1.27	60	9.50
AS Request A/XXX FOR Eg. A=11.63, B=3.00 CODE Nr.=11.63/3.00		

W.E.