

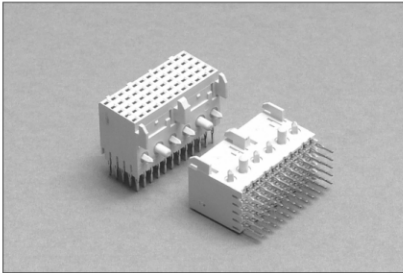
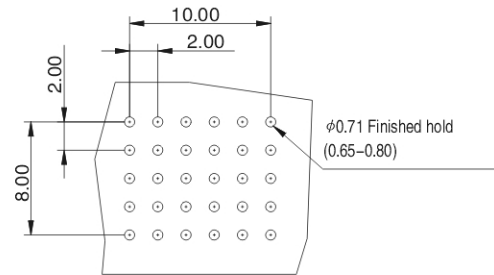
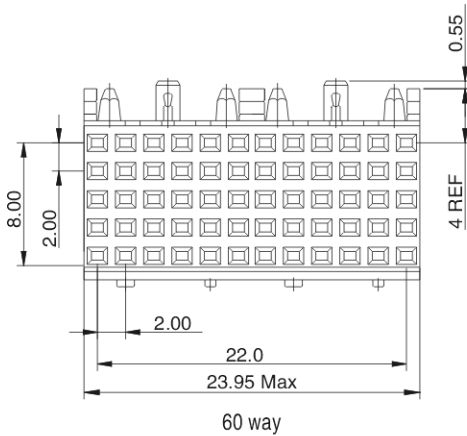
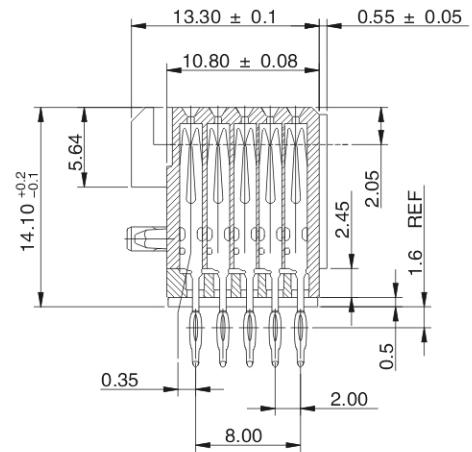


## Female signal straight solder or press-fit,pins – 5 ROWS



### Features

- Grid at 2 mm spacing(0.079inch)
- Stackable end to end without contact loss
- Recommended for use with parallel PCB
- Compatible with straight or right angle male connectors
- Material: LCP(SMT compatible)
- Standard plating:gold over nickel
- Possibility of longer press-fit termination
- Use a special insertion tool for press-in process

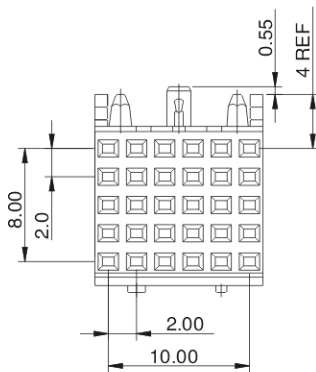

P.C.B.LAYOUT

### Ordering Information

No.of contact	30	60
Termination Type	Press Fit	
Termination	Plating	Parts Number
4.2mm	10u"	1688-P-30 F10SO1CP1
		1688-P-60 F10SO1CP1