

607


Pin header strip 1.27mm x1.27mm pitch

Technical Data :


Insulator Material: High Temperature Thermoplastic,UL 94V-0.
 Contact : 0.40x0.40mm
 Contact Material: copper alloy
 Plating: Au or Sn over Nickel
 Current Rating : 1 Amp
 Insulator resistance : 500 Megohms min
 Dielectric withstanding : AC 500V for 1 Minute
 Operating Temperature: -40°C to +105°C.
 Max. processing Temp: 230°C for 30-60 seconds.
 260°C for 10 seconds.
 Mates with : 605,606,606-1,606-2,613



RoHS Compliant

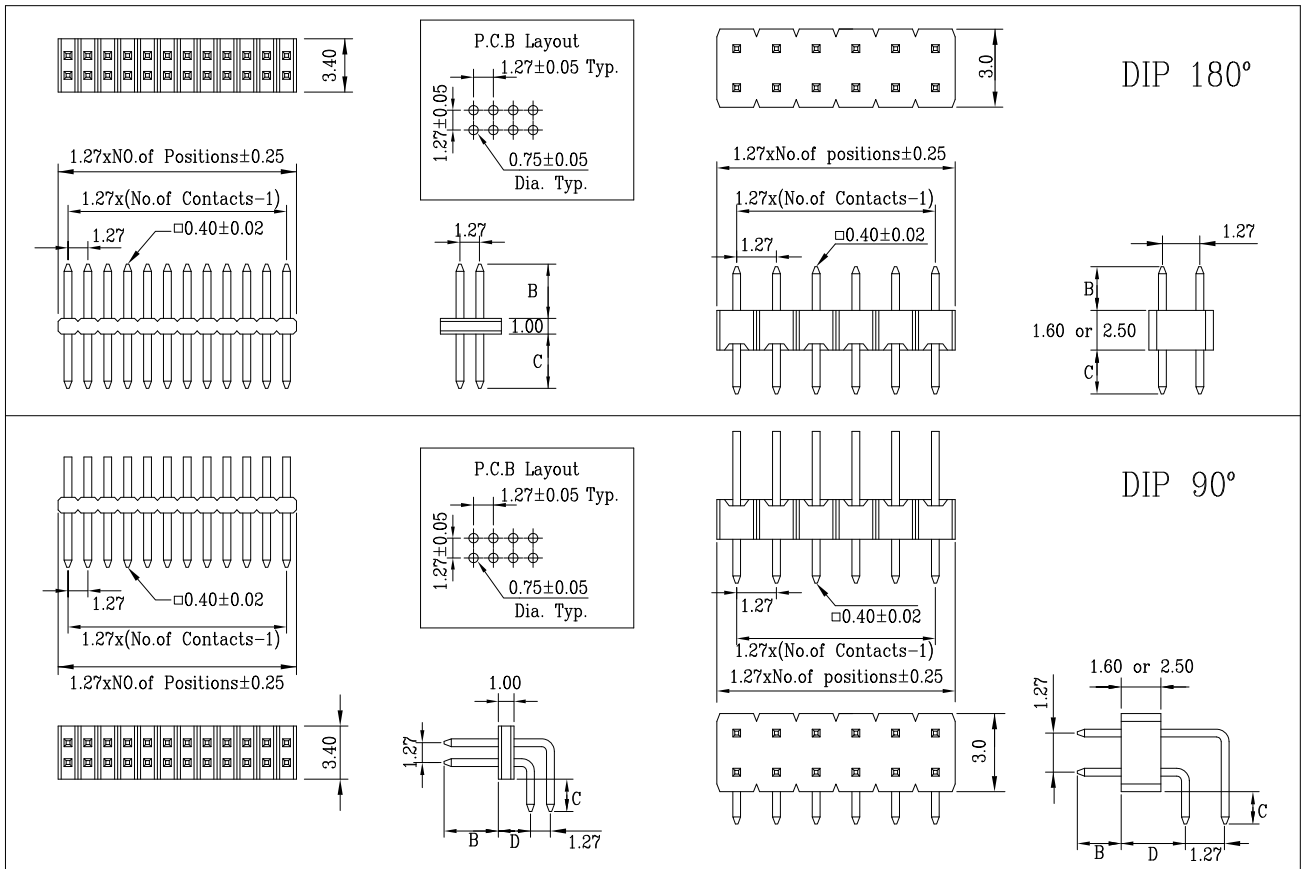

How to order



Nr. of Contact	Code
Double Row Max.100 contacts	002-100

Profile: H	Code
Height of base 1.0mm	10
Height of base 1.6mm	20
Height of base 2.5mm	30

Dimensions			Code
B	C	D	
2.7	2.29		10
3.05	2.29		20
1.91	2.29		30
1.65	2.29		40
as request			XX
For EX. B=2.05 C=2.6 D=2.3			
Code Nr. =2.05/2.6/2.3			

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

Connector Type	Code
DIP 180°	Omit
DIP 90°	RA

W.E.