


# 609B

Pin-Header-Strips-Double row for Surface Mount Technic and High-Temperature Body 1.27mm pitch


## Technical Data :

Insulator Material: High Temperature Thermoplastic,UL 94V-0.  
 Contact : 0.40x0.40mm  
 Contact Material: copper alloy  
 Plating: Au or Sn over Nickel  
 Current Rating : 1 Amp  
 Insulator resistance : 500 Megohms min  
 Dielectric withstanding : AC 500V for 1 Minute  
 Operating Temperature: -40°C to +105°C.  
 Max. processing Temp: 230°C for 30-60 seconds.  
 260°C for 10 seconds.

Mates with : S,C Type mates with 605,606,&134.  
 J,K Type mates with 134



## RoHS Compliant

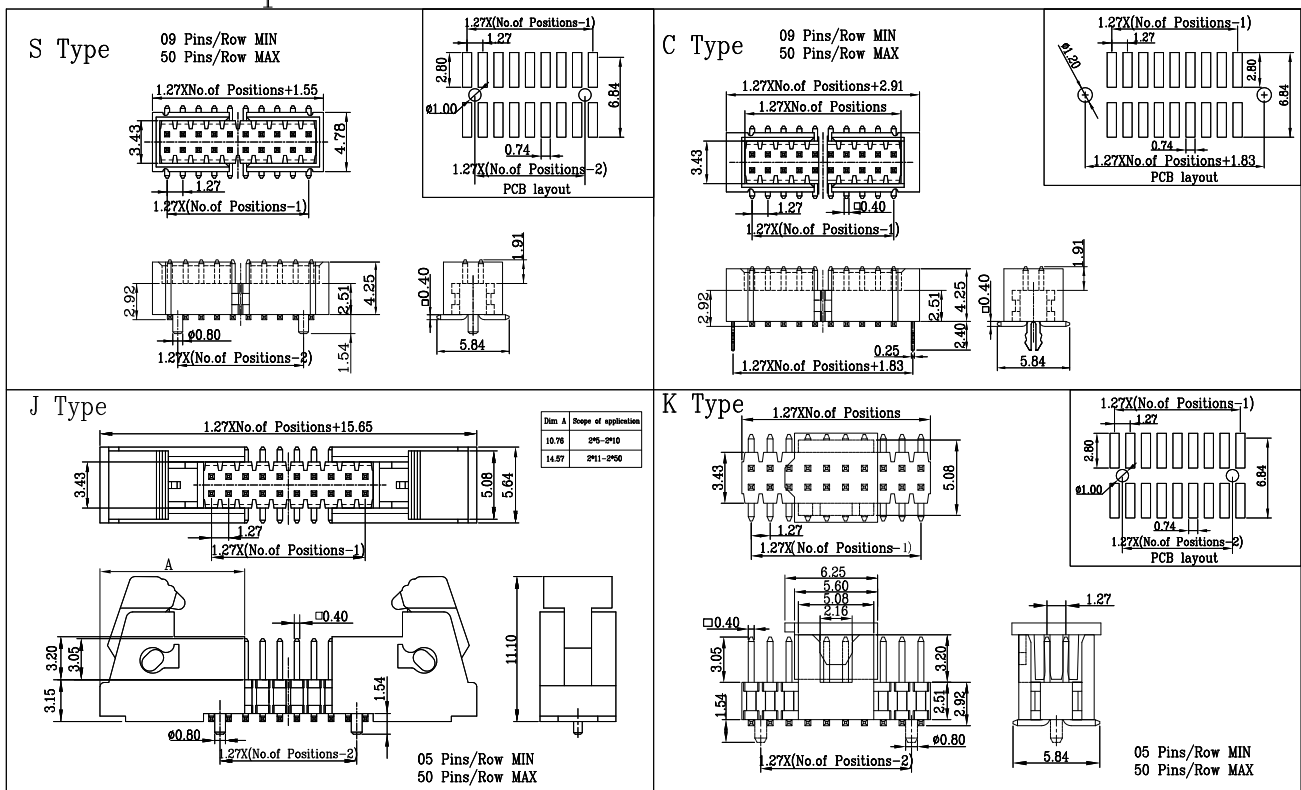

How to order **609B** -  -  -  -  -  -  -  -

Serie-Nr.      Nr.of Contact.      Connector Type      Plating      cap option      Packing      Location Peg

Nr. of Contact	Code
Double Row Max. 100 contacts	010-100

Connector Type	Code
S Type	1
J Type	2
C Type	3
K Type	4

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

Pick & Place pad	Code
W / Cap	1
W / 0 Cap	2

Packing option	Code
Tube	1
Tape & Reel	2

Location Peg	Code
W/ Locatoin Peg	10
W/O Locatoin Peg	00

\* Dip solder Type are Available

W.E.