


597


1.0mm Pitch Female header

Technical Data:


Insulator Material: High Temperature Thermoplastic, UL 94V-0
 Contact: stamped and formed, Phosphor Bronze
 Plating: Au or Sn over Nickel
 Current Rating: 1 Amp
 Contact resistance: 20 milliohms Max.
 Insulator resistance: 500 Megohms min.
 Dielectric withstanding: AC 500V for 1 Minute.
 Operating Temperature: -40°C to +105°C.
 Max. processing Temp: 230°C for 30-60 seconds.
 260°C for 10 seconds.
 Mates with: 595, 596



RoHS Compliant

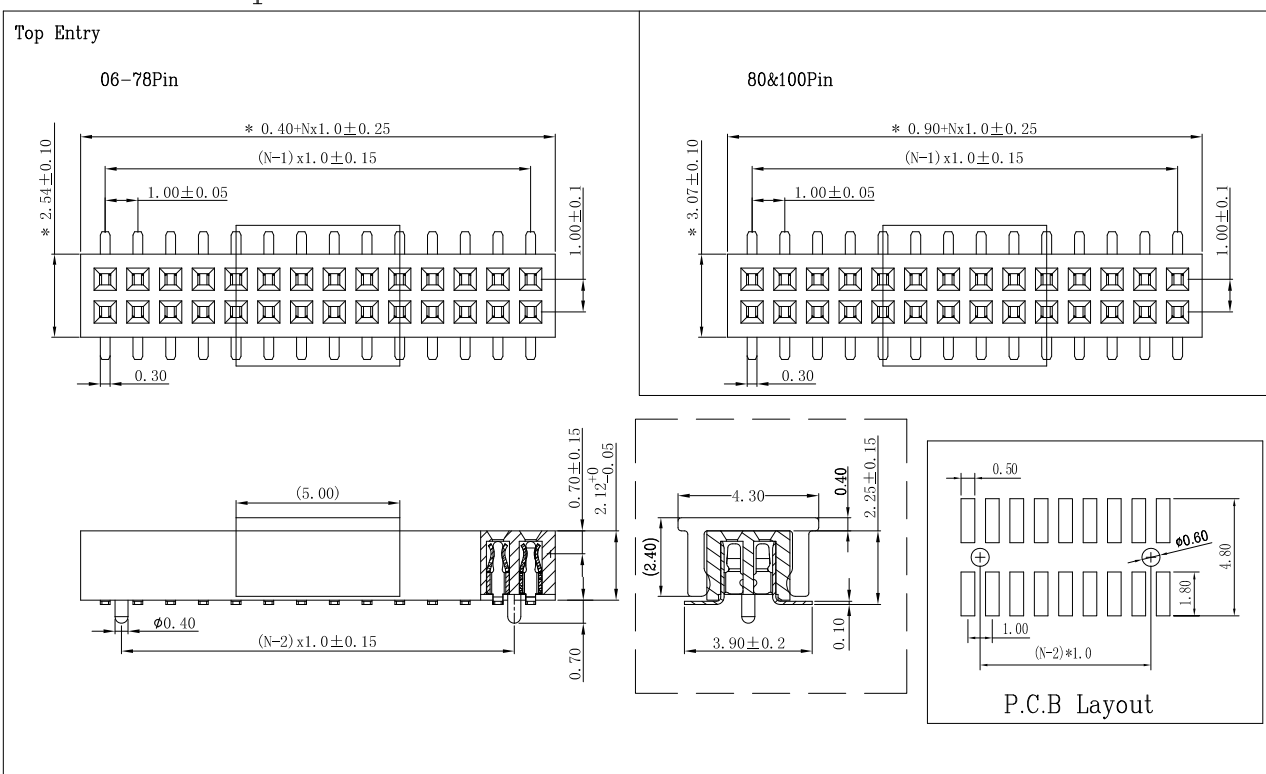

How to order



Nr. of Contact	Code
06 to 100 contacts	06-100

Connector type	Code
Top Entry Profile: 2.25mm	10

Pick & Place Pad	Code
W/ Cap	1
W/O Cap	2

Plating option	Code
Full gold flash plated	10
Tin plated	50

Packing Option	Code
Tube	1
Tape & Reel	2

Location peg option	Code
W/ peg	10
W/O peg	00

W.E.