


316


Economy Female-Headers- 2.0mm pitch,profile H:4.3&7.2mm

Technical Data :


Insulator Material: High Temperature Thermoplastic,UL 94V-0
 Contact : stamped and formed,Phosphor Bronze
 Plating: Au or Sn over Nickel
 Current Rating : 1 Amp
 Contact resistance: 20 milliohms Max.
 Insulator resistance : 1000 Megohms min.
 Dielectric withstanding : AC 500V for 1 Minute.
 Operating Temperature: -40°C to +105°C.
 Max. processing Temp: 230°C for 30-60 seconds.
 260°C for 10 seconds.
 Mates with : Pitch 2.0mm, □0.50mm male header



RoHS Compliant

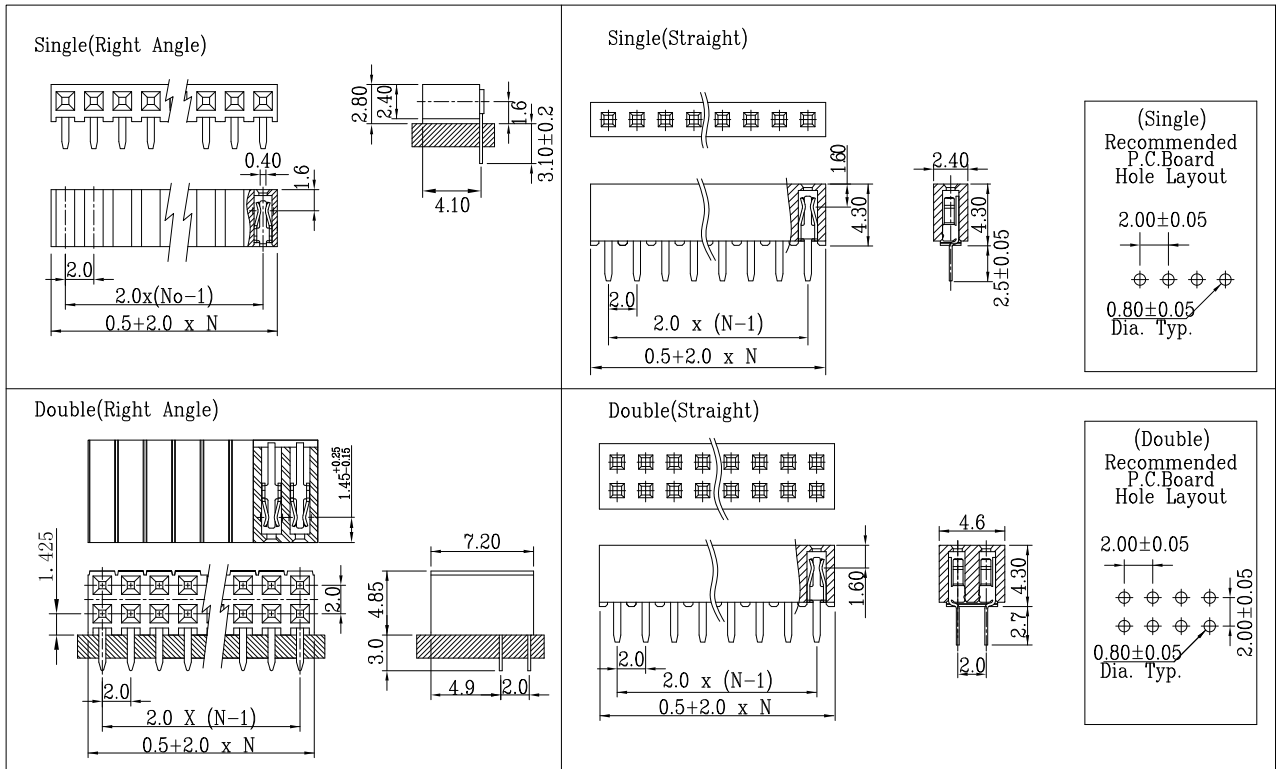

How to order



| Number of contact | Code | Number of row | Code | Plating option contact | Code | Connector type | Code |
|------------------------|-------|---------------|------|-----------------------------|------|----------------|------|
| 1-single max. 40 poles | 03-40 | Single | 1 | Gold plated | 10 | Straight Type | 11 |
| 2-double max. 80 poles | 06-80 | Double | 2 | Tin plated | 50 | Right Angle | 20 |
| | | | | Selective gold flash plated | 60 | | |
| | | | | 10U"Selective gold plated | 610 | | |
| | | | | 20U"Selective gold plated | 620 | | |
| | | | | 30U"Selective gold plated | 630 | | |

W.E.